


STAINLESS STEEL



STAINLESS STEEL

CABLE TRAYS		
INOXKBSI 60	Cable tray with interlocking ends	8-375
INOXKG 60	Cable tray not perforated	8-375
INOXD	Universal cover	8-376
ACCESSORIES CABLE TRAYS		
INOXB 90	Horizontal bend 90°	8-377
INOXDB 90	Cover for horizontal bend 90°	8-377
INOXSB 90	Rising elbow 90°	8-378
INOXDSB 90	Cover for rising elbow 90°	8-378
INOXVB 90	Low elbow 90°	8-379
INOXDVB 90	Cover for low elbow 90°	8-379
INOXAS	Horizontal adapter 90°	8-380
INOXDAS	Cover for horizontal adapter 90°	8-380
INOXT	Horizontal T-piece	8-381
INOXDT	Cover for horizontal T-piece	8-381
INOXKR	Cross-over	8-382
INOXDKR	Cover for cross-over	8-382
INOXDS 60	Hinged joint	8-383
INOXSLOS 60	Division plate free	8-383
INOXV 60*200	Jointing plate	8-383
KBV	Fast locking for KBSI	8-384
WIRE CABLE TRAYS		
INOXVF 60	Wire cable tray heavy duty	8-384
INOXD	Universal cover	8-385
DCLVF	Captive lid clamp VF/VFL	8-385
ACCESSORIES WIRE CABLE TRAYS		
INOXKPVF	Jointing plate for wire cable tray	8-385
INOXVFK	Jointing clamp for wire cable tray	8-386
INOXVFKK 25	Jointing clamp for wire cable tray	8-386
INOXVFKG 30	Jointing clamp for wire cable tray	8-386
INOXVFKS	Support joint for wire cable tray	8-387
INOXVFCB	Central suspension bracket	8-387
INOXVFM	Wall bracket	8-387
INOXVFMM	Wall and mounting bracket	8-388
INOXVFO	Suspension piece	8-388
INOXVMB	Floor and wall bracket	8-388
CABLE LADDERS		
INOXKL	Cable ladder	8-389
ACCESSORIES CABLE LADDERS		
INOXKLB	Horizontal bend for INOXKL	8-389
INOXKLT	T-piece for INOXKL	8-390
INOXKLG	Cross-over for INOXKL	8-390
INOXKLVB	Flexible (Rising and Low) Bend INOXKL	8-391
INOXAB 60	Distance bracket for INOXKL	8-391
INOXBK	Fixation for bracket for INOXKL	8-391
MOUNTING SYSTEMS		
INOXPB	Ceiling bracket	8-392
INOXVOMEGA	Connector piece	8-392
INOXCOMEGA 290	Open suspension bracket	8-392
INOXLOMEGA 150	Bracket / Ceiling profile	8-393
INOXWK	Joined bracket	8-393
INOXHSLE	Single ceiling profile	8-394
INOXMP 41*21*2.50 SL	Assembly profile	8-394
INOXMP 41*41*2.50 SL	Assembly profile	8-394
INOXTIM	Threaded rod (DIN 975)	8-395
INOXVM	Toothed round head bolt/nut (DIN 603)	8-395
INOXGM	Sliding nut GM41/M12	8-395
INOXB	Bolt (DIN 933)	8-396
INOXM	Nut (DIN 934)	8-396
INOXCRO	Flat giant washer (DIN 9021)	8-396
INOXRO	Giant washer (DIN 125-1 A)	8-397

INOX 316

Stainless steel is used in locations where high resistance to corrosion is a primary requisite as well as sometimes in extreme circumstances (high temperature and/or pressure).

Stainless steel consists of an iron alloy which contains a minimum of 13% chromium. The quantity of chromium prevents the formation of corrosion in a non-polluted atmosphere. The high corrosion resistance is the result of the formation of a thin oxide film on the surface, which prevents the steel beneath from being damaged. If this oxide film is damaged as a result of mechanical or chemical treatment and the circumstances are such that it is not repaired, then local corrosion may occur, while the remainder of the surface remains unaffected. For example, in an acid, reducing solution it is usually not possible for the metal to form a protective oxide film.

At the moment there are some 200 different kinds of steels that may be described as "stainless" steel. Every year modified or new alloys appear. Some alloys now contain almost 30% chromium. In addition, a large number of other elements are added to obtain specific properties, depending on the manufacturing process.

Among the added elements, there is nickel, carbon, titanium, aluminium, copper, sulphur and selenium.

One of the best known standards is that drawn up by the American Iron and Steel Institute (AISI), under which a specific quality of stainless steel is indicated by three figures. Another well-known method is the German method whereby the stainless steel is characterised using a material number. In practice, the question of the extent to which a specific type of stainless steel defined in terms of the AISI standard corresponds to a material number often arises.

AISI
STAINLESS STEEL 316L

The general characteristics of stainless steel 316 are as follows:

- austenite, chromium-nickel-molybdenum stainless and heat-resistant steel;
- superior resistance to corrosion as compared to most other chromium-nickel types of steel in several corrosive environments, including the maritime climate;
- very good creep strength at high temperatures (up to 760°C);
- high resistance to corrosion by sulphuric acid.


Applications

- apparatus and parts for the chemical and cellulose industry;
- paper and pulp industry;
- pharmaceutical industry;
- photographic industry;
- textile industry;
- dye industry;
- fermentation vats;
- dairy factories;
- breweries.

INOXKBSI 60



Cable tray with interlocking ends

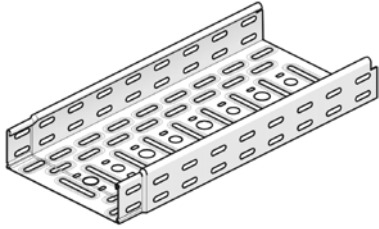

Interlocking ends
Alternative perforations
Return flanges

On Demand	Stainless Steel 304
Length	3000 mm
Standard finish	Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/m	⊞	Stock	Unit
-	INOXKBSI 60*075*0.80	60	75	0.800	3000	1.200	3	✓	m
-	INOXKBSI 60*100*0.80	60	100	0.800	3000	1.300	3	✓	m
-	INOXKBSI 60*150*0.80	60	150	0.800	3000	1.600	3	✓	m
-	INOXKBSI 60*200*0.80	60	200	0.800	3000	1.900	3	✓	m
-	INOXKBSI 60*300*0.80	60	300	0.800	3000	2.400	3	✓	m
-	INOXKBSI 60*400*1.00	60	400	1.000	3000	3.700	3	✓	m
-	INOXKBSI 60*500*1.00	60	500	1.000	3000	4.500	3	✓	m
-	INOXKBSI 60*600*1.00	60	600	1.000	3000	5.300	3	✓	m

To fix with:

-	KBV	-	-	-	-	0.010	96	✓	piece
---	-----	---	---	---	---	-------	----	---	-------


LOAD DIAGRAM

Graph valid for INOXKBSI 60. This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 par 10.3.3. test type III with connection to 1/5 of the span.

F = max. admissible load (daN/m)


L = support distance (m)

Max. deflection (m) = L/100

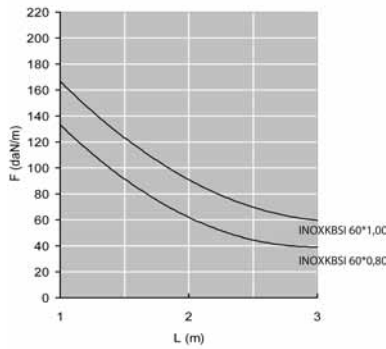

INOXKG 60

Cable tray not perforated

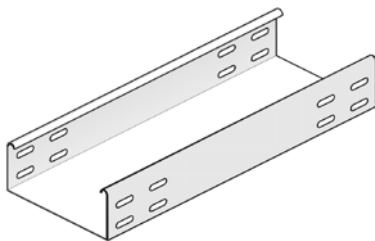


Smooth surface
Return flanges

On Demand	Stainless Steel 304
Length	3000 mm
Standard finish	Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/m	⊞	Stock	Unit
-	INOXKG 60*075*0.80	60	75	0.800	3000	1.400	30		m
-	INOXKG 60*100*0.80	60	100	0.800	3000	1.500	30		m
-	INOXKG 60*150*0.80	60	150	0.800	3000	1.830	30		m
-	INOXKG 60*200*0.80	60	200	0.800	3000	2.170	30		m
-	INOXKG 60*300*0.80	60	300	0.800	3000	2.770	30		m
-	INOXKG 60*400*1.00	60	400	1.000	3000	4.460	30		m
-	INOXKG 60*500*1.00	60	500	1.000	3000	5.260	30		m
-	INOXKG 60*600*1.00	60	600	1.000	3000	6.130	30		m

To fix with:

-	INOXV 60*200	50	200	-	-	0.090	48	✓	piece
---	--------------	----	-----	---	---	-------	----	---	-------

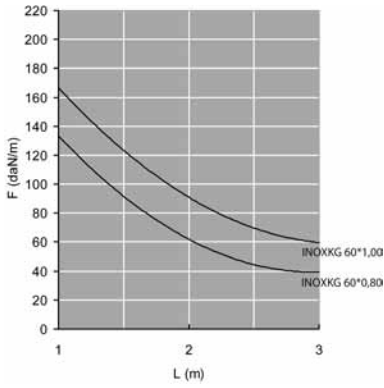

LOAD DIAGRAM

Graph valid for INOXKG 60. This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 par 10.3.3 test type III with connection to 1/5 of the span.


F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

INOXD

Universal cover

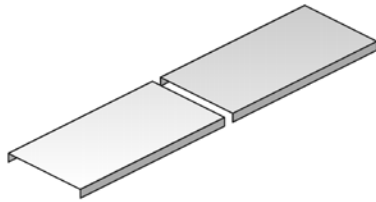

Cover with board height of 10 mm.

On Demand	Stainless Steel 304
Length	3000 mm
Standard finish	Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/m	⊞	Stock	Unit
-	INOXD 075	10	77	-	3000	0.500	3		m
-	INOXD 100	10	102	-	3000	0.820	3		m
-	INOXD 150	10	152	-	3000	1.170	3		m
-	INOXD 200	10	202	-	3000	1.420	3		m
-	INOXD 300	10	302	-	3000	2.100	3		m
-	INOXD 400	10	402	-	3000	4.150	3		m
-	INOXD 500	10	502	-	3000	5.000	3		m
-	INOXD 600	10	602	-	3000	5.650	3		m


To fix with:

-	DCL	-	-	-	-	0.005	96	✓	piece
---	-----	---	---	---	---	-------	----	---	-------

Cover clamp DCL to be ordered separately.
2 pieces per meter.

INOXB 90

Horizontal bend 90°

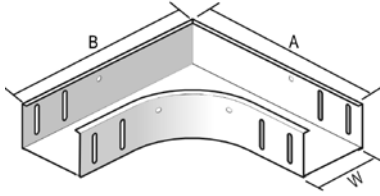

Slide over the cable trays


Radius	100 mm
On Demand	Stainless Steel 304
Standard finish	Stainless Steel

W	75	100	150	200	300	400	500	600
A	280	305	355	405	505	605	705	805
B	280	305	355	405	505	605	705	805

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
-	INOXB 90*60*075	60	75	-	-	0.850	1		piece
-	INOXB 90*60*100	60	100	-	-	1.080	1		piece
-	INOXB 90*60*150	60	150	-	-	1.480	1		piece
-	INOXB 90*60*200	60	200	-	-	1.750	1		piece
-	INOXB 90*60*300	60	300	-	-	2.700	1		piece
-	INOXB 90*60*400	60	400	-	-	3.400	1		piece
-	INOXB 90*60*500	60	500	-	-	5.900	1		piece
-	INOXB 90*60*600	60	600	-	-	7.200	1		piece
To fix with:									
-	INOXVM 6*10	-	-	M6	10	0.010	250	✓	piece

INOXDB 90

Cover for horizontal bend 90°




Radius	100 mm
On Demand	Stainless Steel 304
Standard finish	Stainless Steel

	75	100	150	200	300	400	500	600
B	281	306	356	406	506	606	706	806

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
-	INOXDB 90*075	10	81	-	-	0.300	1		piece
-	INOXDB 90*100	10	106	-	-	0.440	1		piece
-	INOXDB 90*150	10	156	-	-	0.720	1		piece
-	INOXDB 90*200	10	206	-	-	0.950	1		piece
-	INOXDB 90*300	10	306	-	-	1.920	1		piece
-	INOXDB 90*400	10	406	-	-	2.400	1		piece
-	INOXDB 90*500	10	506	-	-	3.540	1		piece
-	INOXDB 90*600	10	606	-	-	6.130	1		piece
To fix with:									
-	DCL	-	-	-	-	0.005	96	✓	piece

INOXSB 90

Rising elbow 90°

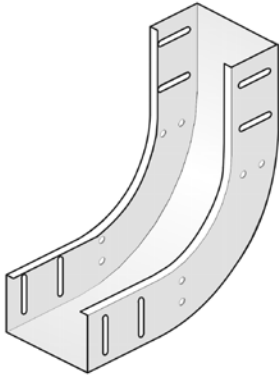

Slide over the cable trays


Radius	100 mm
On Demand	Stainless Steel 304
Standard finish	Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
-	INOXSB 90*60*075	60	75	-	-	0.650	1		piece
-	INOXSB 90*60*100	60	100	-	-	0.730	1		piece
-	INOXSB 90*60*150	60	150	-	-	0.880	1		piece
-	INOXSB 90*60*200	60	200	-	-	1.000	1		piece
-	INOXSB 90*60*300	60	300	-	-	1.180	1		piece
-	INOXSB 90*60*400	60	400	-	-	1.430	1		piece
-	INOXSB 90*60*500	60	500	-	-	1.900	1		piece
-	INOXSB 90*60*600	60	600	-	-	2.150	1		piece

To fix with:									
-	INOXVM 6*10	-	-	M6	10	0.010	250	✓	piece

INOXDSB 90

Cover for rising elbow 90°

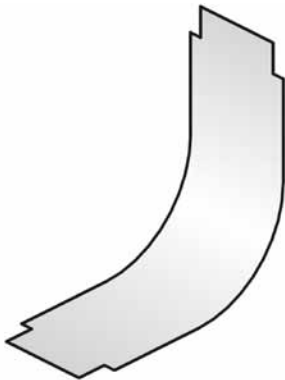


Radius	100 mm
On Demand	Stainless Steel 304
Standard finish	Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
-	INOXDSB 90*075	-	75	-	-	0.180	1		piece
-	INOXDSB 90*100	-	100	-	-	0.250	1		piece
-	INOXDSB 90*150	-	150	-	-	0.360	1		piece
-	INOXDSB 90*200	-	200	-	-	0.510	1		piece
-	INOXDSB 90*300	-	300	-	-	0.730	1		piece
-	INOXDSB 90*400	-	400	-	-	1.020	1		piece
-	INOXDSB 90*500	-	500	-	-	1.050	1		piece
-	INOXDSB 90*600	-	600	-	-	1.600	1		piece

To fix with:									
-	DCL	-	-	-	-	0.005	96	✓	piece

INOXVB 90

Low elbow 90°

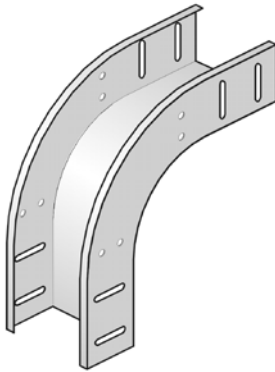

Slide over the cable trays

Radius	100 mm
On Demand	Stainless Steel 304
Standard finish	Stainless Steel


HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
-	INOXVB 90*60*075	60	75	-	-	0.630	1		piece
-	INOXVB 90*60*100	60	100	-	-	0.650	1		piece
-	INOXVB 90*60*150	60	150	-	-	0.780	1		piece
-	INOXVB 90*60*200	60	200	-	-	0.850	1		piece
-	INOXVB 90*60*300	60	300	-	-	1.080	1		piece
-	INOXVB 90*60*400	60	400	-	-	1.330	1		piece
-	INOXVB 90*60*500	60	500	-	-	1.430	1		piece
-	INOXVB 90*60*600	60	600	-	-	1.600	1		piece

To fix with:

-	INOXVM 6*10	-	-	M6	10	0.010	250	✓	piece
---	-------------	---	---	----	----	-------	-----	---	-------

INOXDVB 90

Cover for low elbow 90°

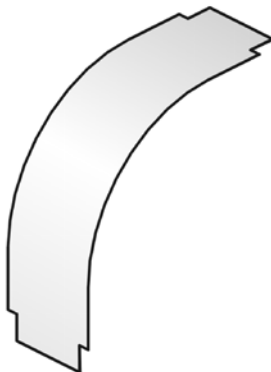

Radius	100 mm
On Demand	Stainless Steel 304
Standard finish	Stainless Steel


HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
-	INOXDVB 90*60*075	-	75	-	-	0.220	1		piece
-	INOXDVB 90*60*100	-	100	-	-	0.320	1		piece
-	INOXDVB 90*60*150	-	150	-	-	0.480	1		piece
-	INOXDVB 90*60*200	-	200	-	-	0.630	1		piece
-	INOXDVB 90*60*300	-	300	-	-	0.960	1		piece
-	INOXDVB 90*60*400	-	400	-	-	1.270	1		piece
-	INOXDVB 90*60*500	-	500	-	-	1.400	1		piece
-	INOXDVB 90*60*600	-	600	-	-	1.950	1		piece

To fix with:

-	DCL	-	-	-	-	0.005	96	✓	piece
---	-----	---	---	---	---	-------	----	---	-------

INOXAS

Horizontal adapter 90°



Slide over the cable trays

Radius	100 mm
On Demand	Stainless Steel 304
Standard finish	Stainless Steel

	75	100	150	200	300	400	500	600
A	483	508	558	608	708	808	908	1008


HD	Reference	↑ mm	↔ mm	↗ mm	↘ mm	kg/piece	⊞	Stock	Unit
-	INOXAS 60*075	60	75	-	-	0.730	1		piece
-	INOXAS 60*100	60	100	-	-	0.800	1		piece
-	INOXAS 60*150	60	150	-	-	0.830	1		piece
-	INOXAS 60*200	60	200	-	-	0.930	1		piece
-	INOXAS 60*300	60	300	-	-	1.050	1		piece
-	INOXAS 60*400	60	400	-	-	1.250	1		piece
-	INOXAS 60*500	60	500	-	-	1.650	1		piece
-	INOXAS 60*600	60	600	-	-	1.900	1		piece

To fix with:

-	INOXVM 6*10	-	-	M6	10	0.010	250	✓	piece
---	-------------	---	---	----	----	-------	-----	---	-------

INOXDAS

Cover for horizontal adapter 90°

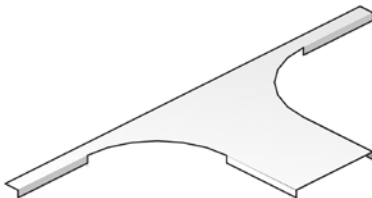

Radius	100 mm
On Demand	Stainless Steel 304
Standard finish	Stainless Steel


HD	Reference	↑ mm	↔ mm	↗ mm	↘ mm	kg/piece	⊞	Stock	Unit
-	INOXDAS 075	10	81	-	-	0.220	1		piece
-	INOXDAS 100	10	106	-	-	0.240	1		piece
-	INOXDAS 150	10	156	-	-	0.360	1		piece
-	INOXDAS 200	10	206	-	-	0.400	1		piece
-	INOXDAS 300	10	306	-	-	0.680	1		piece
-	INOXDAS 400	10	406	-	-	0.750	1		piece
-	INOXDAS 500	10	506	-	-	0.980	1		piece
-	INOXDAS 600	10	606	-	-	1.130	1		piece

To fix with:

-	DCL	-	-	-	-	0.005	96	✓	piece
---	-----	---	---	---	---	-------	----	---	-------

INOXT

Horizontal T-piece

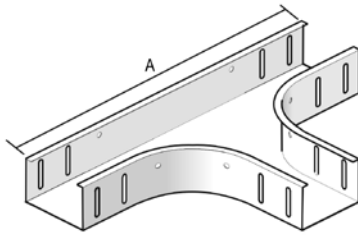

Slide over the cable trays

Radius	100 mm
On Demand	Stainless Steel 304
Standard finish	Stainless Steel

	75	100	150	200	300	400	500	600
A	483	508	558	608	708	808	908	1008


HD	Reference	↑ mm	↔ mm	↗ mm	↘ mm	kg/piece	📦	Stock	Unit
-	INOXT 60*075	60	75	-	-	1.300	1		piece
-	INOXT 60*100	60	100	-	-	1.450	1		piece
-	INOXT 60*150	60	150	-	-	1.850	1		piece
-	INOXT 60*200	60	200	-	-	2.100	1		piece
-	INOXT 60*300	60	300	-	-	2.950	1		piece
-	INOXT 60*400	60	400	-	-	3.900	1		piece
-	INOXT 60*500	60	500	-	-	6.800	1		piece
-	INOXT 60*600	60	600	-	-	8.100	1		piece

To fix with:

-	INOXVM 6*10	-	-	M6	10	0.010	250	✓	piece
---	-------------	---	---	----	----	-------	-----	---	-------

INOXDT

Cover for horizontal T-piece

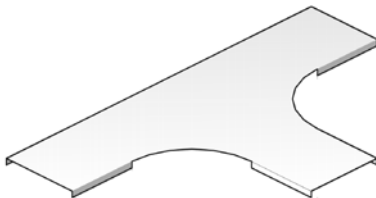

Radius	100 mm
On Demand	Stainless Steel 304
Standard finish	Stainless Steel


HD	Reference	↑ mm	↔ mm	↗ mm	↘ mm	kg/piece	📦	Stock	Unit
-	INOXDT 075	10	81	-	-	0.480	1		piece
-	INOXDT 100	10	106	-	-	0.620	1		piece
-	INOXDT 150	10	156	-	-	0.910	1		piece
-	INOXDT 200	10	206	-	-	1.270	1		piece
-	INOXDT 300	10	306	-	-	2.160	1		piece
-	INOXDT 400	10	406	-	-	2.950	1		piece
-	INOXDT 500	10	506	-	-	5.500	1		piece
-	INOXDT 600	10	606	-	-	7.200	1		piece

To fix with:

-	DCL	-	-	-	-	0.005	96	✓	piece
---	-----	---	---	---	---	-------	----	---	-------

INOXKR

Cross-over

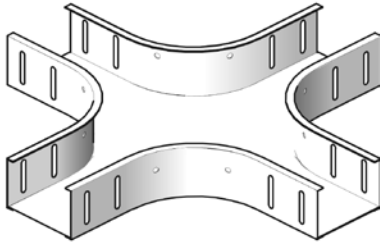

Slide over the cable trays

Radius	100 mm
On Demand	Stainless Steel 304
Standard finish	Stainless Steel


HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
-	INOXKR 60*075	60	75	-	-	1.650	1		piece
-	INOXKR 60*100	60	100	-	-	1.750	1		piece
-	INOXKR 60*150	60	150	-	-	2.100	1		piece
-	INOXKR 60*200	60	200	-	-	2.300	1		piece
-	INOXKR 60*300	60	300	-	-	3.800	1		piece
-	INOXKR 60*400	60	400	-	-	4.700	1		piece
-	INOXKR 60*500	60	500	-	-	7.300	1		piece
-	INOXKR 60*600	60	600	-	-	8.800	1		piece

To fix with:

-	INOXVM 6*10	-	-	M6	10	0.010	250	✓	piece
---	-------------	---	---	----	----	-------	-----	---	-------

INOXDKR

Cover for cross-over

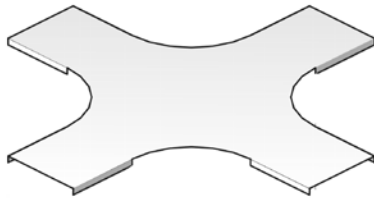

Radius	100 mm
On Demand	Stainless Steel 304
Standard finish	Stainless Steel


HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
-	INOXDKR 075	10	81	-	-	0.700	1		piece
-	INOXDKR 100	10	106	-	-	0.770	1		piece
-	INOXDKR 150	10	156	-	-	1.160	1		piece
-	INOXDKR 200	10	206	-	-	1.590	1		piece
-	INOXDKR 300	10	306	-	-	2.480	1		piece
-	INOXDKR 400	10	406	-	-	5.000	1		piece
-	INOXDKR 500	10	506	-	-	6.700	1		piece
-	INOXDKR 600	10	606	-	-	8.300	1		piece

To fix with:

-	DCL	-	-	-	-	0.005	96	✓	piece
---	-----	---	---	---	---	-------	----	---	-------

INOXDS 60

Hinged joint

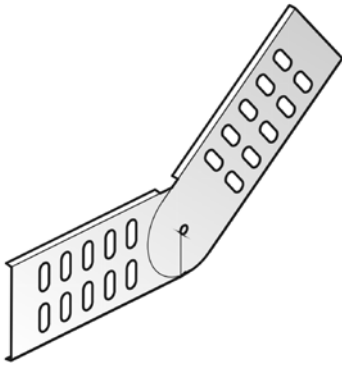


On Demand Stainless Steel 304

Standard finish Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXDS 60	60	-	-	-	0.130	50		piece
To fix with:									
-	INOXVM 6*10	-	-	M6	10	0.010	250	✓	piece

INOXSLOS 60

Division plate free

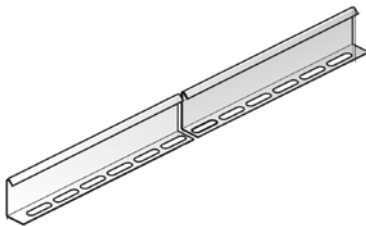


On Demand Stainless Steel 304

Standard finish Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/m	📦	Stock	Unit
-	INOXSLOS 60	60	-	-	3000	0.510	3		m
To fix with:									
-	INOXVM 6*10	-	-	M6	10	0.010	250	✓	piece

INOXV 60*200

Jointing plate

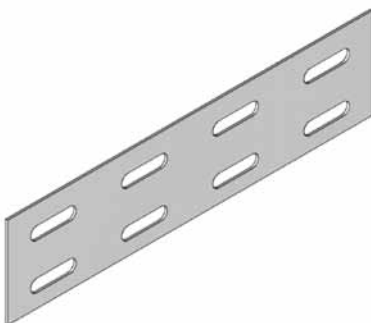

On Demand Stainless Steel 304

Standard finish Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXV 60*200	50	200	-	-	0.090	48	✓	piece

KBV

Fast locking for KBSI




Standard finish

Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
-	KBV	-	-	-	-	0.010	96	✓	piece

INOXVF 60

Wire cable tray heavy duty

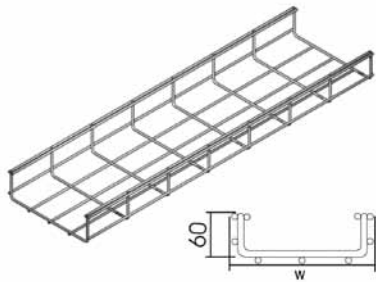

Screen : 50*100 mm
Thread : 5.00 mm

On Demand

Stainless Steel 304

Length

3000 mm

Standard finish

Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/m	⊞	Stock	Unit
-	INOXVF 60*050	60	50	-	3000	0.690	3	✓	m
-	INOXVF 60*100	60	97	-	3000	1.010	3	✓	m
-	INOXVF 60*150	60	147	-	3000	1.200	3	✓	m
-	INOXVF 60*200	60	197	-	3000	1.390	3	✓	m
-	INOXVF 60*300	60	297	-	3000	1.760	3	✓	m
-	INOXVF 60*400	60	397	-	3000	2.650	3	✓	m
-	INOXVF 60*500	60	497	-	3000	3.810	3	✓	m

To fix with:

-	INOXKPVF	60	-	-	-	0.100	30	✓	piece
-	INOXVFK	-	-	-	-	0.020	50	✓	piece
-	INOXVFKS	55	250	-	-	0.270	30	✓	piece


LOAD DIAGRAM

Graph valid for INOXVF 60. This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 par 10.3.3 test type III with connection to 1/5 of the span.

F = max. admissible load (daN/m)


L = support distance (m)

Max. deflection (m) = L/100

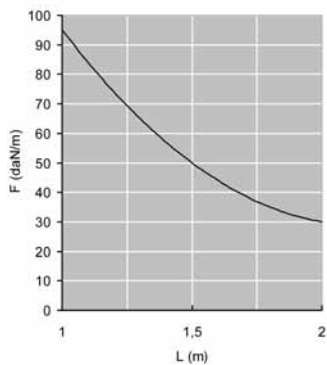

INOXD

Universal cover

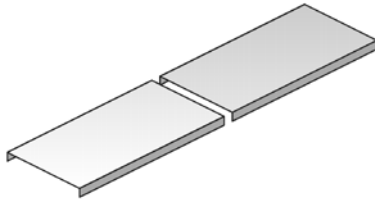

On Demand	Stainless Steel 304
Length	3000 mm
Standard finish	Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/m	📦	Stock	Unit
-	INOXD 075	10	77	-	3000	0.500	3		m
-	INOXD 100	10	102	-	3000	0.820	3		m
-	INOXD 150	10	152	-	3000	1.170	3		m
-	INOXD 200	10	202	-	3000	1.420	3		m
-	INOXD 300	10	302	-	3000	2.100	3		m
-	INOXD 400	10	402	-	3000	4.150	3		m
-	INOXD 500	10	502	-	3000	5.000	3		m
-	INOXD 600	10	602	-	3000	5.650	3		m

To fix with:									
-	DCLVF	-	-	-	-	0.005	100	✓	piece

Cover clamp DCLVF to be ordered separately.
2 pieces per meter.

DCLVF

Captive lid clamp VF/VFL



Standard finish	Stainless Steel
-----------------	-----------------

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	📦	Stock	Unit
-	DCLVF	-	-	-	-	0.005	100	✓	piece

2 pieces per meter.

INOXKPVF

Jointing plate for wire cable tray



On Demand	Stainless Steel 304
Standard finish	Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXKPVF	60	-	-	-	0.100	30	✓	piece

For a quick jointing without bolts and nuts. Can only be used with INOXVF 60.

INOXVFK

Jointing clamp for wire cable tray




Standard finish

Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
-	INOXVFK	-	-	-	-	0.020	50	✓	piece

INOXVFKK 25

Jointing clamp for wire cable tray



Standard finish

Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
-	INOXVFKK 25	-	25	-	-	0.020	200	✓	piece

INOXVFKG 30

Jointing clamp for wire cable tray



Standard finish

Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
-	INOXVFKG 30	-	30	-	-	0.020	200	✓	piece

INOXVFKS**Support joint for wire cable tray**

For maximum stability and safety

On Demand

Stainless Steel 304

Standard finish

Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXVFKS	55	250	-	-	0.270	30	✓	piece

Toothed round head and nut included.

INOXVFCB**Central suspension bracket**

Standard finish


Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/set	📦	Stock	Unit
-	INOXVFCB	-	-	-	-	0.070	24	✓	set

Per set (2 pieces)

Can be used for wire cable trays INOXVF 60*100 and INOXVF 60*150.

Threaded rod INOXTIM 6 or INOXTIM 8 and nut INOXM 6 or INOXM 8, should be ordered separately.

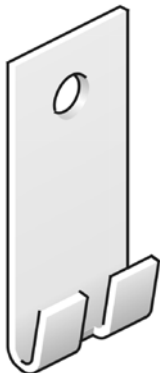INOXVFM**Wall bracket**

For fixation on the wall


Standard finish

Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXVFM	-	-	-	-	0.030	48	✓	piece

INOXVFMM

Wall and mounting bracket

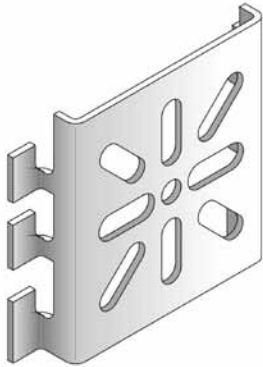

For fixation of contact boxes and wall fixation


On Demand Stainless Steel 304

Standard finish Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXVFMM	60	-	-	-	0.080	20	✓	piece

INOXVFO

Suspension piece



For threaded rod suspension INOXM 6 / INOXM 8


Standard finish Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXVFO	-	-	-	-	0.030	12	✓	piece

Threaded rod INOXTIM 6 or INOXTIM 8 should be ordered separately.

INOXVMB

Floor and wall bracket

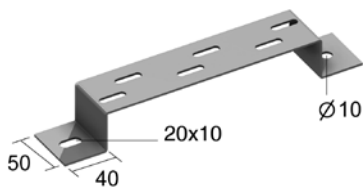

Suitable as floor-, wall-, and suspension bracket

On Demand Stainless Steel 304


Standard finish Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXVMB 100	40	100	-	-	0.190	30	✓	piece
-	INOXVMB 150	40	150	-	-	0.220	30	✓	piece
-	INOXVMB 200	40	200	-	-	0.260	30	✓	piece
-	INOXVMB 300	40	300	-	-	0.330	30	✓	piece
-	INOXVMB 400	40	400	-	-	0.390	30	✓	piece

Wall bracket : to mount with INOXVFK.

INOXKL

Cable ladder

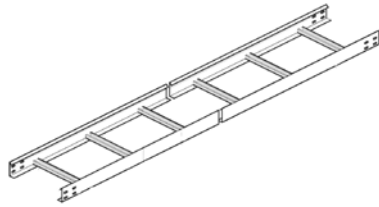

Side walls : L-profile
C-rungs

Useful inner height	45 mm
Rung distance	300 mm
On Demand	Stainless Steel 304
Length	3000 mm
Standard finish	Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/m	⊠	Stock	Unit
-	INOXKL 60*200	60	200	-	3000	2.370	3		m
-	INOXKL 60*300	60	300	-	3000	2.570	3		m
-	INOXKL 60*400	60	400	-	3000	2.770	3		m
-	INOXKL 60*500	60	500	-	3000	2.970	3		m
-	INOXKL 60*600	60	600	-	3000	3.200	3		m

To fix with:

-	INOXV 60*200	50	200	-	-	0.090	48	✓	piece
---	--------------	----	-----	---	---	-------	----	---	-------


LOAD DIAGRAM

Graph valid for INOXKL 60. This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 par 10.3.3 test type III with connection to 1/5 of the span.

F = max. admissible load (daN/m)


L = support distance (m)

Max. deflection (m) = L/100

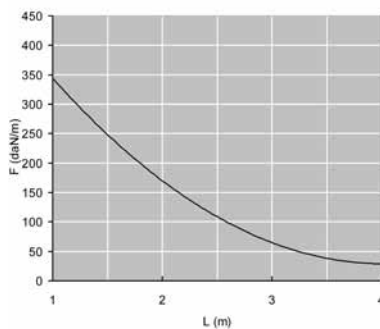

INOXKLB

Horizontal bend for INOXKL

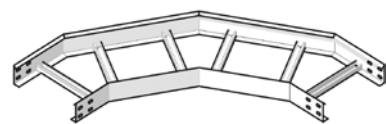

Radius	600 mm
On Demand	Stainless Steel 304
Standard finish	Stainless Steel


HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊠	Stock	Unit
-	INOXKLB 60*200	60	200	-	-	2.900	1		piece
-	INOXKLB 60*300	60	300	-	-	3.600	1		piece
-	INOXKLB 60*400	60	400	-	-	4.200	1		piece
-	INOXKLB 60*500	60	500	-	-	4.600	1		piece
-	INOXKLB 60*600	60	600	-	-	5.050	1		piece

To fix with:

-	INOXVM 6*10	-	-	M6	10	0.010	250	✓	piece
-	INOXV 60*200	50	200	-	-	0.090	48	✓	piece

INOXKLT

T-piece for INOXKL

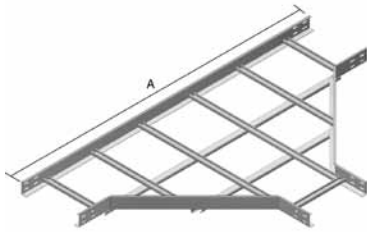

Radius	600 mm
On Demand	Stainless Steel 304
Standard finish	Stainless Steel


	200	300	400	500	600
A	1400	1500	1600	1700	1800

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
-	INOXKLT 60*200	60	200	-	-	5.400	1		piece
-	INOXKLT 60*300	60	300	-	-	5.800	1		piece
-	INOXKLT 60*400	60	400	-	-	6.500	1		piece
-	INOXKLT 60*500	60	500	-	-	6.900	1		piece
-	INOXKLT 60*600	60	600	-	-	8.600	1		piece

To fix with:									
-	INOXVM 6*10	-	-	M6	10	0.010	250	✓	piece
-	INOXV 60*200	50	200	-	-	0.090	48	✓	piece

INOXKLK

Cross-over for INOXKL

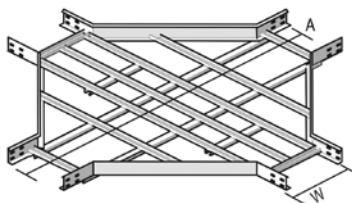

Radius	600 mm
On Demand	Stainless Steel 304
Standard finish	Stainless Steel

	200	300	400	500	600
A	1400	1500	1600	1700	1800

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
-	INOXKLK 60*200	60	200	-	-	8.200	1		piece
-	INOXKLK 60*300	60	300	-	-	8.900	1		piece
-	INOXKLK 60*400	60	400	-	-	9.800	1		piece
-	INOXKLK 60*500	60	500	-	-	10.800	1		piece
-	INOXKLK 60*600	60	600	-	-	11.400	1		piece

To fix with:									
-	INOXVM 6*10	-	-	M6	10	0.010	250	✓	piece
-	INOXV 60*200	50	200	-	-	0.090	48	✓	piece

INOXKLVB

Flexible (Rising and Low) Bend INOXKL




On Demand	Stainless Steel 304
Standard finish	Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXKLVB 60*200	60	200	-	-	3.700	1		piece
-	INOXKLVB 60*300	60	300	-	-	4.000	1		piece
-	INOXKLVB 60*400	60	400	-	-	4.200	1		piece
-	INOXKLVB 60*500	60	500	-	-	4.600	1		piece
-	INOXKLVB 60*600	60	600	-	-	4.900	1		piece
To fix with:									
-	INOXVM 6*10	-	-	M6	10	0.010	250	✓	piece
-	INOXV 60*200	50	200	-	-	0.090	48	✓	piece

INOXAB 60

Distance bracket for INOXKL

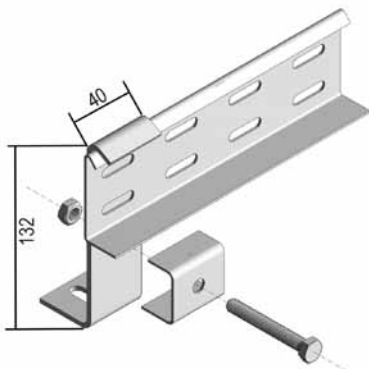

For vertical mounting of the cable ladder

On Demand	Stainless Steel 304
Standard finish	Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXAB 60	132	40	-	-	0.230	10	✓	piece

INOXBK

Fixation for bracket for INOXKL



For fixation of the cable ladder on the wall bracket


Standard finish	Stainless Steel
-----------------	-----------------

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXBK	-	-	-	-	0.020	50	✓	piece

Number : 2 per bracket

INOXPB

Ceiling bracket




On Demand Stainless Steel 304

Standard finish Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXPB	70	-	-	-	0.100	20	✓	piece

INOXVOMEGA

Connector piece



On Demand Stainless Steel 304


Standard finish Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXVOMEGA	-	-	-	-	0.060	10	✓	piece

For wall mounting 1 piece, for double mounting 2 pieces, back to back.

INOXCOMEGA 290

Open suspension bracket

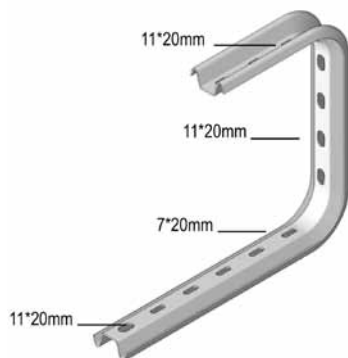

Useful for direct mounting to the ceiling or with threaded rod INOXTIM 8 or INOXTIM 10.

On Demand Stainless Steel 304

Standard finish Stainless Steel


	Max. load (in daN)
INOXCOMEGA 290*100	70
INOXCOMEGA 290*150	60
INOXCOMEGA 290*200	60
INOXCOMEGA 290*250	50
INOXCOMEGA 290*300	50
INOXCOMEGA 290*400	40

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXCOMEGA 290*100	290	145	-	-	0.520	12	✓	piece
-	INOXCOMEGA 290*150	290	195	-	-	0.560	12	✓	piece
-	INOXCOMEGA 290*200	290	245	-	-	0.620	12	✓	piece
-	INOXCOMEGA 290*300	290	345	-	-	0.820	6	✓	piece
-	INOXCOMEGA 290*400	290	445	-	-	0.930	6	✓	piece

Fixation of the cable tray by INOXVVM 6*20. Use the INOXVOMEGA to avoid compression of the profile.

INOXLOMEGA 150

Bracket / Ceiling profile



On Demand	Stainless Steel 304
Standard finish	Stainless Steel


	Max. load (in daN)
INOXLOMEGA 150*100	110
INOXLOMEGA 150*150	100
INOXLOMEGA 150*200	90
INOXLOMEGA 150*300	70
INOXLOMEGA 150*400	50
INOXLOMEGA 150*500	40
INOXLOMEGA 150*600	30

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
-	INOXLOMEGA 150*100	145	145	-	-	0.300	12	✓	piece
-	INOXLOMEGA 150*150	145	195	-	-	0.320	12	✓	piece
-	INOXLOMEGA 150*200	145	245	-	-	0.340	12	✓	piece
-	INOXLOMEGA 150*300	145	345	-	-	0.490	6	✓	piece
-	INOXLOMEGA 150*400	145	445	-	-	0.540	6	✓	piece
-	INOXLOMEGA 150*500	145	545	-	-	0.640	6	✓	piece
-	INOXLOMEGA 150*600	145	645	-	-	0.770	6	✓	piece

Use the INOXVOMEGA to avoid compression of the profiles.

INOXWK

Joined bracket

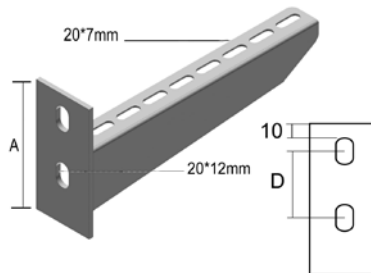

For direct fixation on the wall and also for fixation on ceiling profiles

On Demand	Stainless Steel 304
Standard finish	Stainless Steel

Width	Max. load (in daN)	A	D
100	360	106.5	46.5
150	300	112	52
200	240	116	56
300	250	125	65
400	260	134	74
500	220	142.5	82.5
600	180	150	90

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
-	INOXWK 100	98	117	-	-	0.300	24	✓	piece
-	INOXWK 150	102	167	-	-	0.360	24	✓	piece
-	INOXWK 200	106	217	-	-	0.430	24	✓	piece
-	INOXWK 300	114	317	-	-	0.730	12	✓	piece
-	INOXWK 400	122	417	-	-	0.880	12	✓	piece
-	INOXWK 500	130	517	-	-	1.300	6	✓	piece
-	INOXWK 600	138	617	-	-	1.600	6	✓	piece

For fixation on the ceiling profile, the necessary fixation set is to be ordered separately : sliding nut INOXGM 41 M 10 and bolt INOXB 10*20.

Max. load (in daN): Uniformly distributed load (UDL) over complete width of cantilever brackets.

INOXHSLE

Single ceiling profile



For fixation of brackets on one side.
 Profile : INOXMP 41*21
 Welded head plate : 120 x 120 mm


On Demand	Stainless Steel 304
Length	200 - 1200 mm
Standard finish	Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	⊞	Stock	Unit
-	INOXHSLE 200	-	-	-	200	0.740	1	✓	piece
-	INOXHSLE 300	-	-	-	300	0.850	1	✓	piece
-	INOXHSLE 400	-	-	-	400	1.010	1	✓	piece
-	INOXHSLE 500	-	-	-	500	1.130	1	✓	piece
-	INOXHSLE 600	-	-	-	600	1.230	1	✓	piece
-	INOXHSLE 800	-	-	-	800	1.450	1	✓	piece
-	INOXHSLE 1000	-	-	-	1000	1.750	1	✓	piece
-	INOXHSLE 1200	-	-	-	1200	1.950	1	✓	piece

Use sliding nut INOXGM 41 M 10 and hexagonal bolt INOXB 10*20.

INOXMP 41*21*2.50 SL

Assembly profile

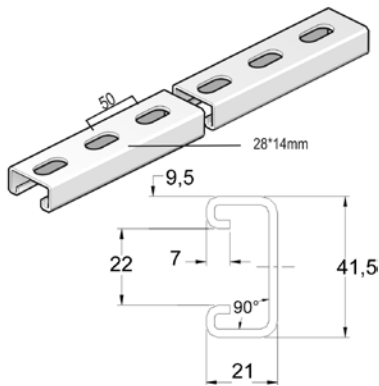


On Demand	Stainless Steel 304
Length	6000 mm
Standard finish	Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/m	⊞	Stock	Unit
-	INOXMP 41*21*2.50*6 SL	41	21	2.500	6000	1.850	6	✓	m

INOXMP 41*41*2.50 SL

Assembly profile

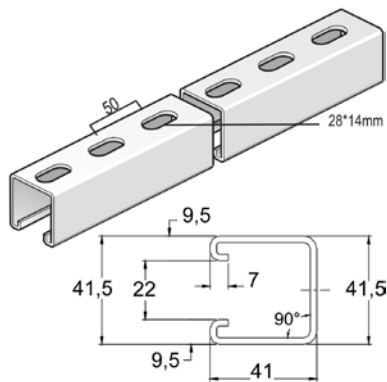

On Demand	Stainless Steel 304
Length	6000 mm
Standard finish	Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/m	⊞	Stock	Unit
-	INOXMP 41*41*2.50*6 SL	41	41	2.500	6000	2.700	6	✓	m

INOXTIM

Threaded rod (DIN 975)



On Demand	Stainless Steel 304
Length	2000 mm
Standard finish	Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/m	📦	Stock	Unit
-	INOXTIM 6	-	-	M6	2000	0.170	200	✓	m
-	INOXTIM 8	-	-	M8	2000	0.310	200	✓	m
-	INOXTIM 10	-	-	M10	2000	0.460	200	✓	m

INOXVM

Toothed round head bolt/nut (DIN 603)




Standard finish	Stainless Steel
-----------------	-----------------

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXVM 6*10	-	-	M6	10	0.010	250	✓	piece
-	INOXVM 6*20	-	-	M6	20	0.020	250	✓	piece

To order per 250 pieces.

INOXGM

Sliding nut GM41/M12

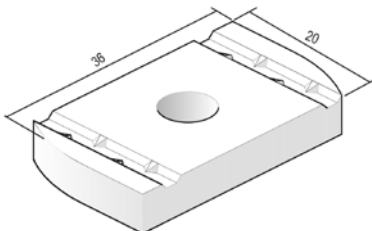


For fixation of the brackets on the ceiling profiles.
To be used for profiles INOXMP 41*21 and INOXMP 41*41.

Standard finish	Stainless Steel
-----------------	-----------------

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXGM 41 M 6	-	-	M6	-	0.030	48	✓	piece
-	INOXGM 41 M 8	-	-	M8	-	0.030	48	✓	piece
-	INOXGM 41 M 10	-	-	M10	-	0.040	48	✓	piece

INOXB

Bolt (DIN 933)



Standard finish


Stainless Steel

HD	Reference	↑ mm	↔ mm	⊘ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXB 6*20	-	-	M6	20	0.010	250	✓	piece
-	INOXB 6*30	-	-	M6	30	0.010	250	✓	piece
-	INOXB 8*20	-	-	M8	20	0.010	250	✓	piece
-	INOXB 8*30	-	-	M8	30	0.020	250	✓	piece
-	INOXB 10*20	-	-	M10	20	0.020	250	✓	piece
-	INOXB 10*30	-	-	M10	30	0.030	250	✓	piece

To order per 250 pieces.

INOXM

Nut (DIN 934)



Standard finish


Stainless Steel

HD	Reference	↑ mm	↔ mm	⊘ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXM 6	-	-	M6	-	0.010	250	✓	piece
-	INOXM 8	-	-	M8	-	0.010	250	✓	piece
-	INOXM 10	-	-	M10	-	0.010	250	✓	piece

To order per 250 pieces.

INOXCRO

Flat giant washer (DIN 9021)



Standard finish


Stainless Steel

HD	Reference	↑ mm	↔ mm	⊘ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXCRO 6	-	-	M6	-	0.010	250	✓	piece
-	INOXCRO 8	-	-	M8	-	0.010	250	✓	piece
-	INOXCRO 10	-	-	M10	-	0.010	250	✓	piece

To order per 250 pieces.

INOXRO

Giant washer (DIN 125-1 A)



Standard finish

Stainless Steel

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/piece	📦	Stock	Unit
-	INOXRO 6	-	-	M6	-	0.010	250	✓	piece
-	INOXRO 8	-	-	M8	-	0.010	250	✓	piece
-	INOXRO 10	-	-	M10	-	0.010	250	✓	piece

To order per 250 pieces.