


INOXKL

Cable ladder

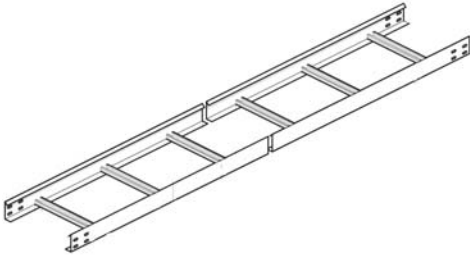

Side walls : L-profile
C-rungs


Useful inner height	45 mm
Rung distance	300 mm
Length	3000 mm
Standard finish	Stainless Steel

1		Reference	Height	Width	Thickness	Length	kg/m	Packaging	Stock	Unit			
-	-	INOXKL 60*200	60	200	-	3000	2,370	3	-	m			
-	-	INOXKL 60*300	60	300	-	3000	2,570	3	-	m			
-	-	INOXKL 60*400	60	400	-	3000	2,770	3	-	m			
-	-	INOXKL 60*500	60	500	-	3000	2,970	3	-	m			
-	-	INOXKL 60*600	60	600	-	3000	3,200	3	-	m			

To fix with:

-	-	INOXV 60*200	60	200	-	-	0,090	48	✓	piece			
---	---	--------------	----	-----	---	---	-------	----	---	-------	--	--	--

More technical specifications for this product can be found at the end of this chapter.

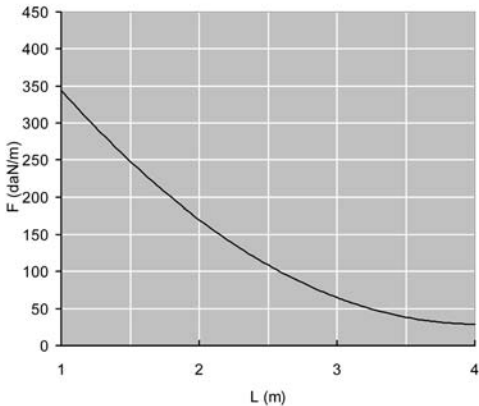INOXKL**LOAD DIAGRAM**

Graph valid for INOXKBSI 60. This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 par 10.3.3 test type III with connection to 1/5 of the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100