


## 2 Industrial floor trunking



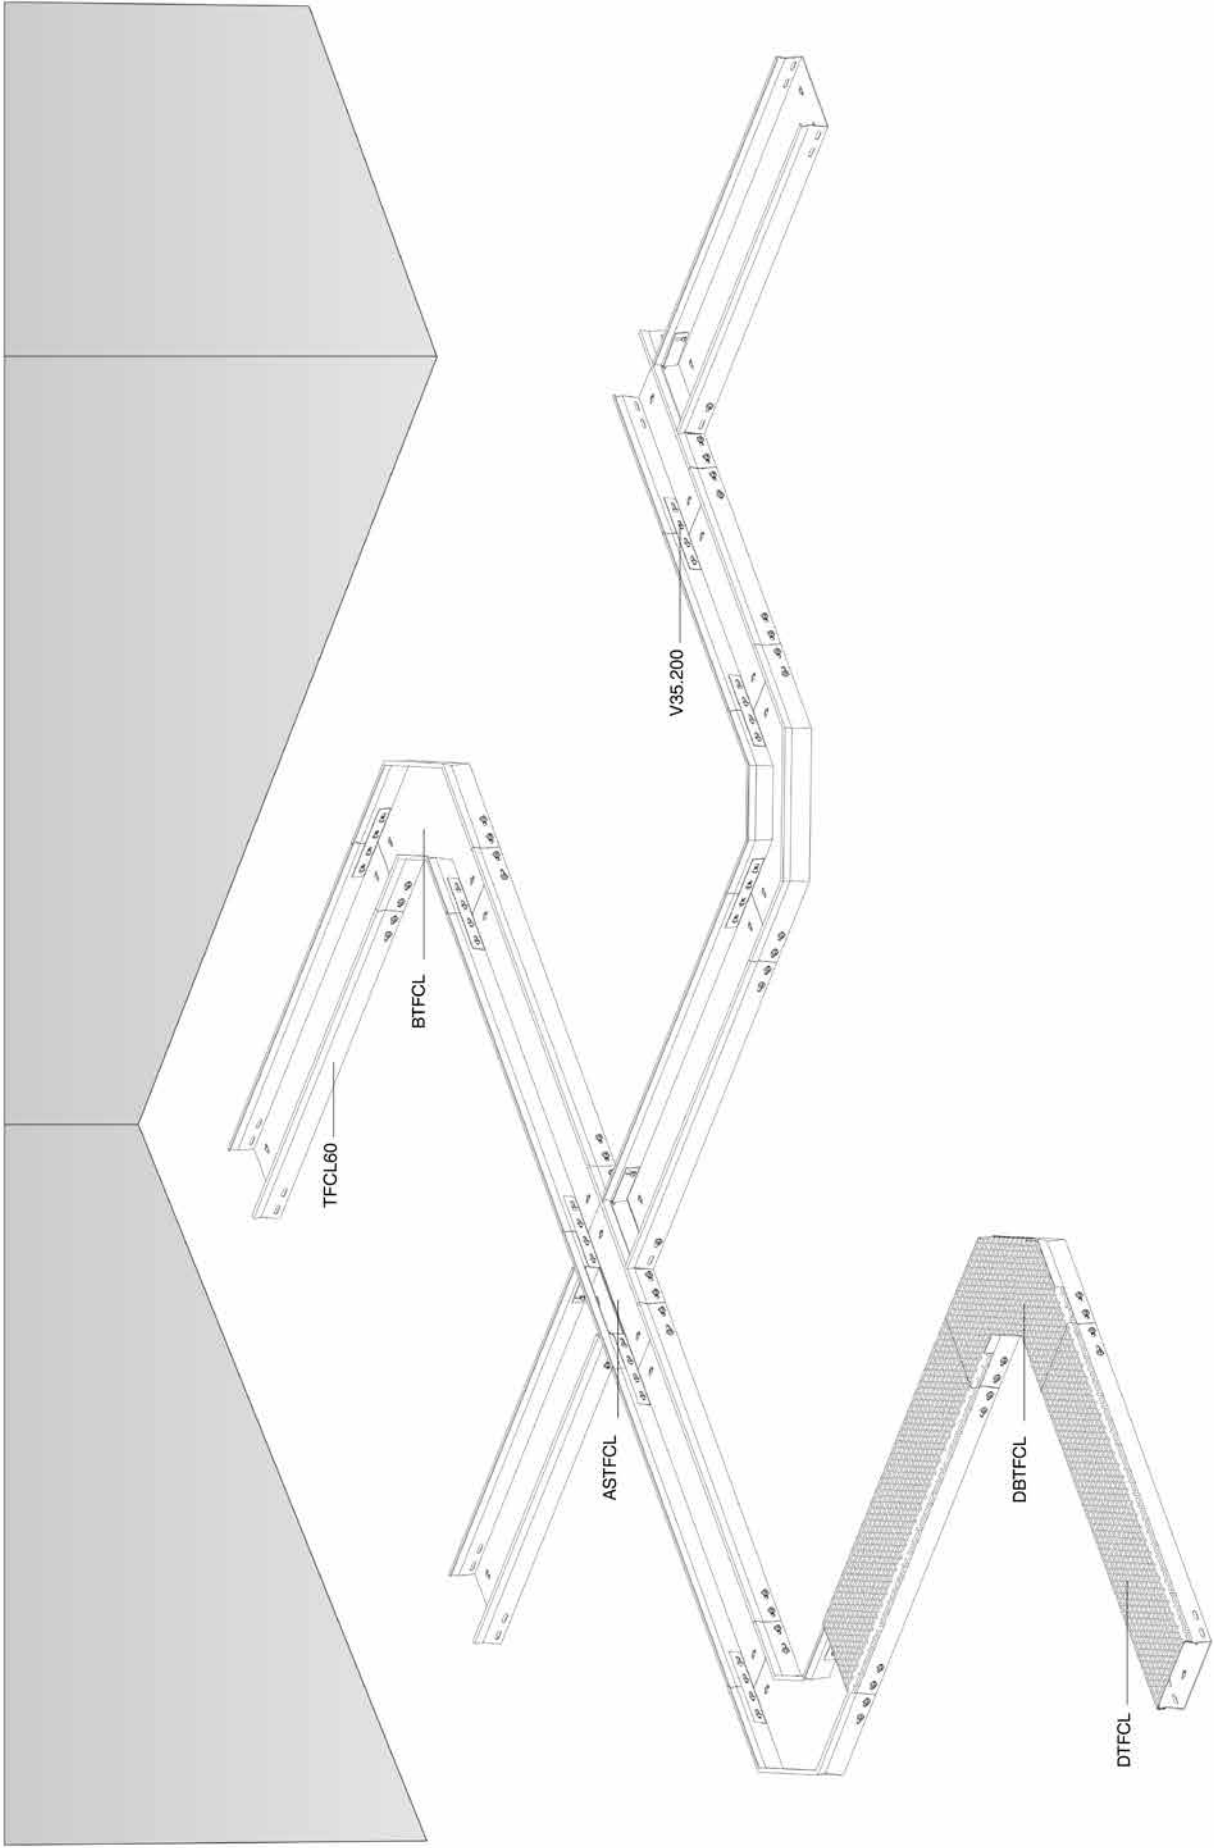

▼ **TFCL**

TFCL60	Industrial floor trunking	62
TFCL60S	TFCL with SIN	63
TFCL85	Industrial floor trunking	64
TFCL85S	TFCL with SIN	65
TFCL110	Industrial floor trunking	66
TFCL110S	TFCL with SIN	67

▼ **COVER**

DTFCL	Cover for industrial floor trunking	67
DGTFCL	Cover for industrial floor trunking	67

▼ **ACCESSORIES**

BTFCL	Horizontal bend 90°	68
DBTFCL	Cover for horizontal bend	68
DGBTFCL	Cover with holes for horizontal bend	69
ASTFCL	Horizontal adapter 90°	69

▼ **Joiner**

V35.200	Joiner	70
V60.200	Joiner	70
V85.200	Joiner	70

# TFCL60

## Industrial floor trunking



Non-perforated base  
Return flanges

Standard finish

Pre-galvanised

Optional finish

Hot-dip galvanised

Optional finish PE

Coating

HD	Reference	↑ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Unit
HD	<b>TFCL60.100.200</b>	60	100	2.00	3000	3.650	30		m
HD	<b>TFCL60.150.200</b>	60	150	2.00	3000	4.440	30		m
HD	<b>TFCL60.200.200</b>	60	200	2.00	3000	5.250	30		m
HD	<b>TFCL60.250.200</b>	60	250	2.00	3000	6.020	30		m
HD	<b>TFCL60.300.200</b>	60	300	2.00	3000	6.850	30		m

Fix with:

HD	<b>V35.200</b>	25	200	-	-	0.040	10	X	piece
----	----------------	----	-----	---	---	-------	----	---	-------

Application area: Industrial floor trunking is being used in surroundings where robots need to have a permanent freedom of movement and where people need to be allowed to walk on the cable trays. For example, at production lines in the automotive industry.

# TFCL60S

## TFCL with SIN



Standard finish

Pre-galvanised

Optional finish

Hot-dip galvanised

Optional finish PE

Coating

HD	Reference	↓ mm	↔ mm	→  ← mm	↔ mm	kg/m	📦	Stock	Unit
HD	<b>TFCL60.100.200S12</b>	60	100	2.00	3000	4.161	30		m
HD	<b>TFCL60.100.200S13</b>	60	100	2.00	3000	4.161	30		m
HD	<b>TFCL60.150.200S12</b>	60	150	2.00	3000	4.951	30		m
HD	<b>TFCL60.150.200S13</b>	60	150	2.00	3000	4.951	30		m
HD	<b>TFCL60.150.200S23</b>	60	150	2.00	3000	5.462	30		m
HD	<b>TFCL60.200.200S12</b>	60	200	2.00	3000	5.761	30		m
HD	<b>TFCL60.200.200S13</b>	60	200	2.00	3000	5.761	30		m
HD	<b>TFCL60.200.200S23</b>	60	200	2.00	3000	6.272	30		m
HD	<b>TFCL60.250.200S12</b>	60	250	2.00	3000	6.531	30		m
HD	<b>TFCL60.250.200S13</b>	60	250	2.00	3000	6.531	30		m
HD	<b>TFCL60.250.200S23</b>	60	250	2.00	3000	7.042	30		m
HD	<b>TFCL60.300.200S12</b>	60	300	2.00	3000	7.361	30		m
HD	<b>TFCL60.300.200S13</b>	60	300	2.00	3000	7.361	30		m
HD	<b>TFCL60.300.200S23</b>	60	300	2.00	3000	7.872	30		m
Fix with:									
HD	<b>V35.200</b>	25	200	-	-	0.040	10	X	piece


S12: one partition in the middle of the cable tray

S13: one partition at the right or the left of the cable tray

S23: two partitions

# TFCL85

## Industrial floor trunking

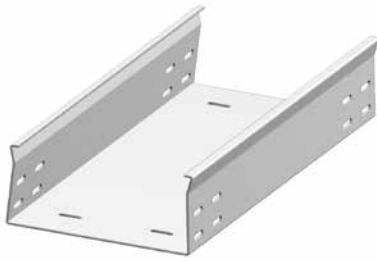

Non-perforated base  
Return flanges

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish PE	Coating

HD	Reference	↑ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Unit
HD	<b>TFCL85.100.200</b>	85	100	2.00	3000	4.430	30		m
HD	<b>TFCL85.150.200</b>	85	150	2.00	3000	5.230	30		m
HD	<b>TFCL85.200.200</b>	85	200	2.00	3000	6.030	30		m
HD	<b>TFCL85.250.200</b>	85	250	2.00	3000	6.830	30		m
HD	<b>TFCL85.300.200</b>	85	300	2.00	3000	7.630	30		m

Fix with:

HD	<b>V60.200</b>	50	200	-	-	0.080	20	X	piece
----	----------------	----	-----	---	---	-------	----	---	-------

Application area: Industrial floor trunking is being used in surroundings where robots need to have a permanent freedom of movement and where people need to be allowed to walk on the cable trays. For example, at production lines in the automotive industry.

# TFCL85S

## TFCL with SIN



Standard finish

Pre-galvanised

Optional finish

Hot-dip galvanised

Optional finish PE

Coating

HD	Reference	↓ mm	↔ mm	→  ← mm	↔ mm	kg/m	📦	Stock	Unit
HD	<b>TFCL85.100.200S12</b>	85	100	2.00	3000	5.110	30		m
HD	<b>TFCL85.100.200S13</b>	85	100	2.00	3000	5.110	30		m
HD	<b>TFCL85.150.200S12</b>	85	150	2.00	3000	5.910	30		m
HD	<b>TFCL85.150.200S13</b>	85	150	2.00	3000	5.910	30		m
HD	<b>TFCL85.150.200S23</b>	85	150	2.00	3000	6.590	30		m
HD	<b>TFCL85.200.200S12</b>	85	200	2.00	3000	6.710	30		m
HD	<b>TFCL85.200.200S13</b>	85	200	2.00	3000	6.710	30		m
HD	<b>TFCL85.200.200S23</b>	85	200	2.00	3000	7.390	30		m
HD	<b>TFCL85.250.200S12</b>	85	250	2.00	3000	7.510	30		m
HD	<b>TFCL85.250.200S13</b>	85	250	2.00	3000	7.510	30		m
HD	<b>TFCL85.250.200S23</b>	85	250	2.00	3000	8.190	30		m
HD	<b>TFCL85.300.200S12</b>	85	300	2.00	3000	8.310	30		m
HD	<b>TFCL85.300.200S13</b>	85	300	2.00	3000	8.310	30		m
HD	<b>TFCL85.300.200S23</b>	85	300	2.00	3000	8.990	30		m
Fix with:									
HD	<b>V60.200</b>	50	200	-	-	0.080	20	X	piece


S12: one partition in the middle of the cable tray

S13: one partition at the right or the left of the cable tray

S23: two partitions

# TFCL110

## Industrial floor trunking

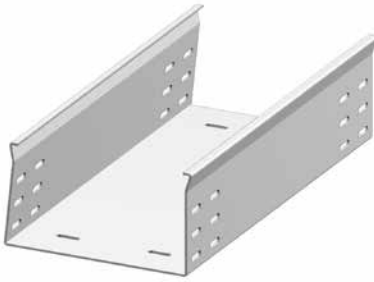

Non-perforated base  
Return flanges

Standard finish

Pre-galvanised

Optional finish

Hot-dip galvanised

Optional finish PE

Coating


HD	Reference	↑ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Stock	Unit
HD	<b>TFCL110.150.200</b>	110	150	2.00	3000	6.020	30		m
HD	<b>TFCL110.200.200</b>	110	200	2.00	3000	6.820	30		m
HD	<b>TFCL110.250.200</b>	110	250	2.00	3000	7.620	30		m
HD	<b>TFCL110.300.200</b>	110	300	2.00	3000	8.420	30		m
Fix with:									
HD	<b>V85.200</b>	75	200	-	-	0.130	10	X	piece

Application area: The industrial floor trunking is being used in surroundings where robots need to have a permanent freedom of movement and where people need to be allowed to walk on the cable trays. For example, at production lines in the automotive industry.



# TFCL110S

TFCL with SIN

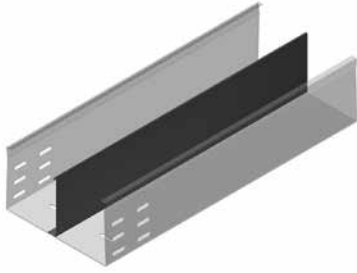

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish PE	Coating

HD	Reference	↓ mm	↔ mm	→  ← mm	↔ mm	kg/m	📦	Stock	Unit
HD	<b>TFCL110.150.200S12</b>	110	150	2.00	3000	6.840	30		m
HD	<b>TFCL110.150.200S13</b>	110	150	2.00	3000	6.840	30		m
HD	<b>TFCL110.150.200S23</b>	110	150	2.00	3000	7.660	30		m
HD	<b>TFCL110.200.200S12</b>	110	200	2.00	3000	7.640	30		m
HD	<b>TFCL110.200.200S13</b>	110	200	2.00	3000	7.640	30		m
HD	<b>TFCL110.200.200S23</b>	110	200	2.00	3000	8.460	30		m
HD	<b>TFCL110.250.200S12</b>	110	250	2.00	3000	8.440	30		m
HD	<b>TFCL110.250.200S13</b>	110	250	2.00	3000	8.440	30		m
HD	<b>TFCL110.250.200S23</b>	110	250	2.00	3000	9.260	30		m
HD	<b>TFCL110.300.200S12</b>	110	300	2.00	3000	9.240	30		m
HD	<b>TFCL110.300.200S13</b>	110	300	2.00	3000	9.240	30		m
HD	<b>TFCL110.300.200S23</b>	110	300	2.00	3000	10.060	30		m

Fix with:

HD	<b>V85.200</b>	75	200	-	-	0.130	10	X	piece
----	----------------	----	-----	---	---	-------	----	---	-------

S12: one partition in the middle of the cable tray

S13: one partition at the right or the left of the cable tray

S23: two partitions

# DTFCL

Cover for industrial floor trunking




Clippable cover.

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish PE	Coating

HD	Reference	↓ mm	↔ mm	→  ← mm	↔ mm	kg/m	📦	Stock	Unit
HD	<b>DTFCL100</b>	18	100	1.50	1500	2.030	30		m
HD	<b>DTFCL150</b>	18	150	1.50	1500	2.790	30		m
HD	<b>DTFCL200</b>	18	200	1.50	1500	3.560	30		m
HD	<b>DTFCL250</b>	18	250	1.50	1500	4.330	30		m
HD	<b>DTFCL300</b>	18	300	1.50	1500	6.480	30		m

# DGTFCL

Cover for industrial floor trunking

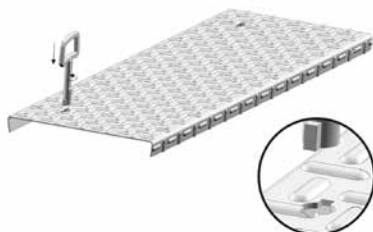

Clippable cover, with openings for double-bit key.

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish PE	Coating

HD	Reference	↓ mm	↔ mm	→  ← mm	↔ mm	kg/m	📦	Stock	Unit
HD	<b>DGTFCL100</b>	18	100	1.50	1500	2.030	30		m
HD	<b>DGTFCL150</b>	18	150	1.50	1500	2.790	30		m
HD	<b>DGTFCL200</b>	18	200	1.50	1500	3.560	30		m
HD	<b>DGTFCL250</b>	18	250	1.50	1500	4.330	30		m
HD	<b>DGTFCL300</b>	18	300	1.50	1500	6.480	30		m

# BTFCL

## Horizontal bend 90°



Non-perforated base  
Return flanges

Radius	250 mm
Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish PE	Coating

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/ piece	📦	Stock	Unit
HD	<b>BTFCL60.100</b>	60	100	2.00	-	3.000	1		piece
HD	<b>BTFCL60.150</b>	60	150	2.00	-	3.830	1		piece
HD	<b>BTFCL60.200</b>	60	200	2.00	-	4.730	1		piece
HD	<b>BTFCL60.250</b>	60	250	2.00	-	5.710	1		piece
HD	<b>BTFCL60.300</b>	60	300	2.00	-	6.740	1		piece
HD	<b>BTFCL85.100</b>	85	100	2.00	-	3.630	1		piece
HD	<b>BTFCL85.150</b>	85	150	2.00	-	4.500	1		piece
HD	<b>BTFCL85.200</b>	85	200	2.00	-	5.430	1		piece
HD	<b>BTFCL85.250</b>	85	250	2.00	-	6.430	1		piece
HD	<b>BTFCL85.300</b>	85	300	2.00	-	7.490	1		piece
HD	<b>BTFCL110.150</b>	110	150	2.00	-	5.150	1		piece
HD	<b>BTFCL110.200</b>	110	200	2.00	-	6.120	1		piece
HD	<b>BTFCL110.250</b>	110	250	2.00	-	7.150	1		piece
HD	<b>BTFCL110.300</b>	110	300	2.00	-	8.240	1		piece
Fix with:									
HD	<b>V35.200</b>	25	200	-	-	0.040	10	X	piece
HD	<b>V60.200</b>	50	200	-	-	0.080	20	X	piece
HD	<b>V85.200</b>	75	200	-	-	0.130	10	X	piece

# DBTFCL

## Cover for horizontal bend




Clippable cover

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish PE	Coating

HD	Reference	↑ mm	↔ mm	↔ mm	↔ mm	kg/ piece	📦	Stock	Unit
HD	<b>DBTFCL100</b>	18	100	1.50	-	1.104	1		piece
HD	<b>DBTFCL150</b>	18	150	1.50	-	1.664	1		piece
HD	<b>DBTFCL200</b>	18	200	1.50	-	2.273	1		piece
HD	<b>DBTFCL250</b>	18	250	1.50	-	2.929	1		piece
HD	<b>DBTFCL300</b>	18	300	1.50	-	3.635	1		piece

# DGBTFCL

## Cover with holes for horizontal bend



Clippable cover, with openings for double-bit key.

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish PE	Coating

HD	Reference	↓ mm	↔ mm	↔ mm	↔ mm	kg/ piece	📦	Stock	Unit
HD	<b>DGBTFCL100</b>	18	100	1.50	-	1.104	1		piece
HD	<b>DGBTFCL150</b>	18	150	1.50	-	1.664	1		piece
HD	<b>DGBTFCL200</b>	18	200	1.50	-	2.273	1		piece
HD	<b>DGBTFCL250</b>	18	250	1.50	-	2.929	1		piece
HD	<b>DGBTFCL300</b>	18	300	1.50	-	3.635	1		piece

# ASTFCL

## Horizontal adapter 90°



Non-perforated base  
Return flanges

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish PE	Coating

HD	Reference	↓ mm	↔ mm	↔ mm	↔ mm	kg/ piece	📦	Stock	Unit
HD	<b>ASTFCL60.100</b>	60	100	2.00	-	1.030	1		piece
HD	<b>ASTFCL60.150</b>	60	150	2.00	-	1.480	1		piece
HD	<b>ASTFCL60.200</b>	60	200	2.00	-	1.980	1		piece
HD	<b>ASTFCL60.250</b>	60	250	2.00	-	2.620	1		piece
HD	<b>ASTFCL60.300</b>	60	300	2.00	-	3.320	1		piece
HD	<b>ASTFCL85.100</b>	85	100	2.00	-	1.230	1		piece
HD	<b>ASTFCL85.150</b>	85	150	2.00	-	1.720	1		piece
HD	<b>ASTFCL85.200</b>	85	200	2.00	-	2.290	1		piece
HD	<b>ASTFCL85.250</b>	85	250	2.00	-	2.950	1		piece
HD	<b>ASTFCL85.300</b>	85	300	2.00	-	3.680	1		piece
HD	<b>ASTFCL110.150</b>	110	150	2.00	-	1.970	1		piece
HD	<b>ASTFCL110.200</b>	110	200	2.00	-	2.580	1		piece
HD	<b>ASTFCL110.250</b>	110	250	2.00	-	3.280	1		piece
HD	<b>ASTFCL110.300</b>	110	300	2.00	-	4.050	1		piece

Fix with:

HD	<b>V35.200</b>	25	200	-	-	0.040	10	X	piece
HD	<b>V60.200</b>	50	200	-	-	0.080	20	X	piece
HD	<b>V85.200</b>	75	200	-	-	0.130	10	X	piece

Multifunction junction piece, which can also be used as a T-piece or cross over piece.

Integrated connectors for potential connection.

## V35.200

### Joiner



Standard finish

Pre-galvanised

Optional finish

Hot-dip galvanised

Optional finish PE

Coating

HD	Reference	↑ mm	↔ mm	→ ← mm	↔ mm	kg/ piece	📦	Stock	Unit
HD	<b>V35.200</b>	25	200		-	0.040	10	X	piece

Fix with:


HD	<b>VM6.10</b>	-	-	M6	10	0.008	100	X	piece
----	---------------	---	---	----	----	-------	-----	---	-------

To order per full packaging.

Minimum number bolts and nuts: 2 pieces.

## V60.200

### Joiner



Standard finish

Pre-galvanised

Optional finish

Hot-dip galvanised

Optional finish PE

Coating

HD	Reference	↑ mm	↔ mm	→ ← mm	↔ mm	kg/ piece	📦	Stock	Unit
HD	<b>V60.200</b>	50	200		-	0.080	20	X	piece

Fix with:

HD	<b>VM6.10</b>	-	-	M6	10	0.008	100	X	piece
----	---------------	---	---	----	----	-------	-----	---	-------

To order per full packaging.

Minimum number bolts and nuts: 4 pieces.

## V85.200

### Joiner



Standard finish

Pre-galvanised

Optional finish

Hot-dip galvanised

Optional finish PE

Coating

HD	Reference	↑ mm	↔ mm	→ ← mm	↔ mm	kg/ piece	📦	Stock	Unit
HD	<b>V85.200</b>	75	200		-	0.130	10	X	piece

Fix with:

HD	<b>VM6.10</b>	-	-	M6	10	0.008	100	X	piece
----	---------------	---	---	----	----	-------	-----	---	-------

To order per full packaging.

Minimum number bolts and nuts: 4 pieces.