





2X

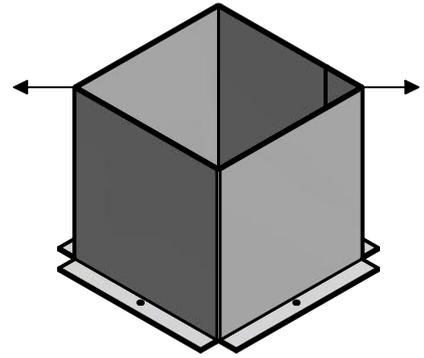

Fold instruction




Orientation: fold indications downwards
Fold the 4 flaps upwards.
Turn over and insert into the mould.

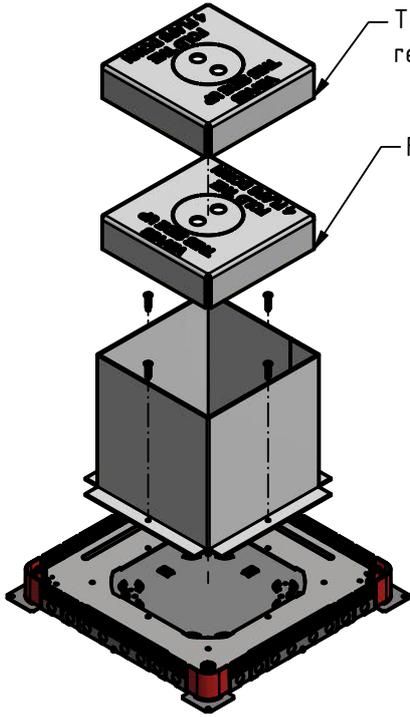


Turn stiffening element 90° relative to the layer below


Free orientation

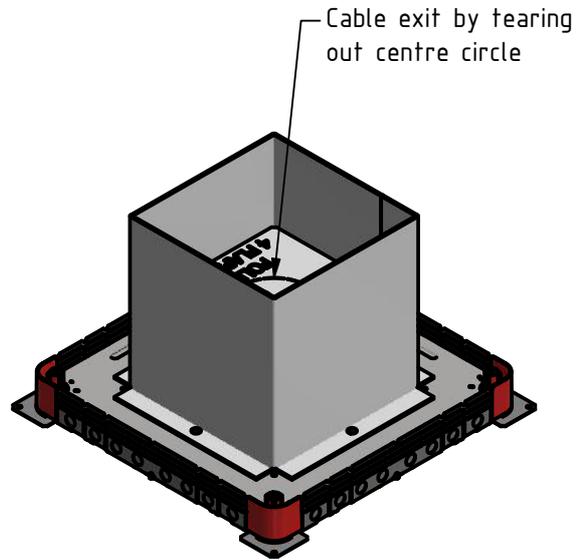


Cable exit by tearing out centre circle

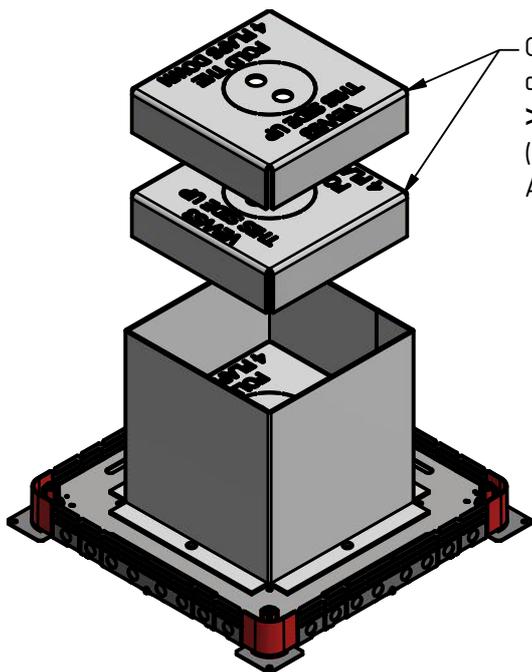

Optional for heigher concrete thicknesses
>HT+137
(article code:VEVVS3)
Additional height 68mm



Maximum achievable standard height feasible: HT+130

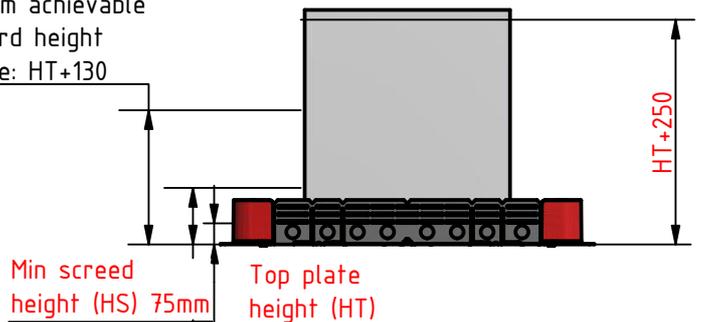

Min screed height (HS) 75mm

Top plate height (HT)