


I6KLZX
Kreuzstück für I6KLZ



Zu befestigen mit:

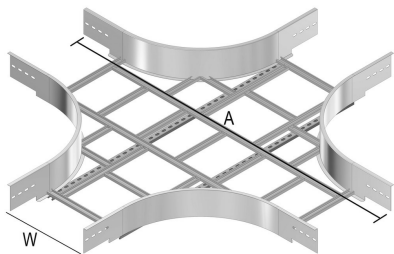

Selbstsichernde Schraube (DIN 603)
I6RBK

Sechskantmutter (DIN 934)
I6M



Unterlegscheibe (DIN 125-1 A)
I6RO

Radius: 600 mm

Standardausführung

Edelstahl V4A / Werkstoffnummer 1.4404

	200	300	400	500	600
A	1962	2062	2162	2262	2362

HD	Referenz	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Lager	Einheit
-	I6KLZX200	150	208			15,159	1		STK
-	I6KLZX300	150	308			18,004	1		STK
-	I6KLZX400	150	408			19,122	1		STK
-	I6KLZX500	150	508			20,191	1		STK
-	I6KLZX600	150	608			21,259	1		STK

Min. Anzahl Schrauben und Muttern: 16 Stück.

Gebeizt und passiviert.