


ZMDIG

Deckel industriell

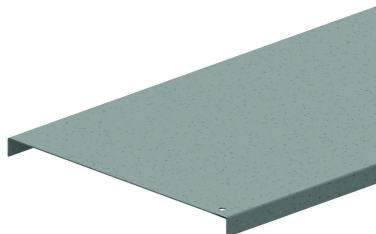

Standardausführung

| HD | Referenz | ↑ mm | ↔ mm | → ← mm | ↔ mm | kg/m | 📦 | Lager | Einheit |
|----|------------------|---------|---------|------------|---------|--------|---|-------|---------|
| - | ZMDIG150 | 15 | 173 | | 2000 | 1,182 | 2 | | M |
| - | ZMDIG200 | 15 | 223 | | 2000 | 1,850 | 2 | | M |
| - | ZMDIG300 | 15 | 323 | | 2000 | 2,650 | 2 | | M |
| - | ZMDIG400 | 15 | 423 | | 2000 | 4,100 | 2 | | M |
| - | ZMDIG450 | 15 | 473 | | 2000 | 3,547 | 2 | | M |
| - | ZMDIG500 | 15 | 523 | | 2000 | 5,050 | 2 | | M |
| - | ZMDIG600 | 15 | 623 | | 2000 | 5,950 | 2 | | M |
| - | ZMDIG750 | 15 | 773 | | 2000 | 7,861 | 2 | | M |
| - | ZMDIG800 | 15 | 823 | | 2000 | 8,352 | 2 | | M |
| - | ZMDIG900 | 15 | 923 | | 2000 | 9,333 | 2 | | M |
| - | ZMDIG1000 | 15 | 1023 | | 2000 | 10,314 | 2 | | M |

Zu befestigen mit:



Deckelklemme
ZMDKIG

Deckel mit Breite > oder = 400 mm werden mit diagonalen Verstärkungsrippen geliefert. Zur Verwendung mit Kabelleiter: -KL-KLL -HDKS -KL100 -KLM125 -HDKLIE -KLW -KLZ -KBWW -KBWZ