


P5500(T)
Befestigungsprofil H62 gelocht M12

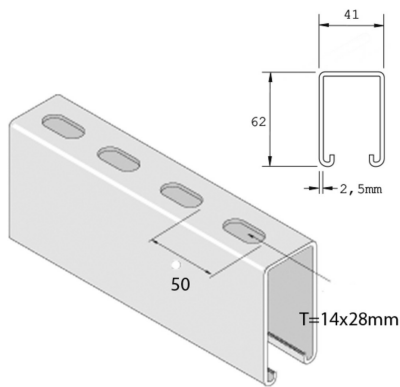

Standardausführung		Sendzimir verzinkt							
Ausführung Option PE		Polyester-Pulverbeschichtung							
HD	Referenz	↕ mm	↔ mm	→ ← mm	↔ mm	kg/m		Lager	Einheit
-	P5500TX6	62	41	2,5	6000	3,600	300	X	M
-	P5500TX3	62	41	2,5	3000	3,600	150		M
-	P5500X6	62	41	2,5	6000	3,750	300		M