


VSB

Steige- und Fallstück für Unterflurkanal

2 oder 3-Zügelig.

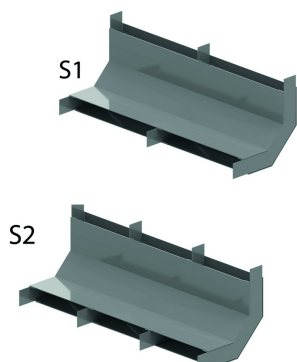

| Referenz | ↑ mm | ↔ mm | → ← mm | ↔ mm | kg/stk | 📦 | Einheit |
|--------------------|---------|---------|------------|---------|--------|---|---------|
| VSB28.170S1 | 28 | 170 | | | 0,600 | 1 | STK |
| VSB28.170S2 | 28 | 170 | | | 0,650 | 1 | STK |
| VSB28.250S1 | 28 | 250 | | | 0,750 | 1 | STK |
| VSB28.250S2 | 28 | 250 | | | 0,800 | 1 | STK |
| VSB28.350S1 | 28 | 350 | | | 1,000 | 1 | STK |
| VSB28.350S2 | 28 | 350 | | | 1,050 | 1 | STK |
| VSB38.170S1 | 38 | 170 | | | 0,600 | 1 | STK |
| VSB38.170S2 | 38 | 170 | | | 0,650 | 1 | STK |
| VSB38.250S1 | 38 | 250 | | | 0,800 | 1 | STK |
| VSB38.250S2 | 38 | 250 | | | 0,850 | 1 | STK |
| VSB38.350S1 | 38 | 350 | | | 1,000 | 1 | STK |
| VSB38.350S2 | 38 | 350 | | | 1,100 | 1 | STK |
| VSB48.170S1 | 48 | 170 | | | 0,600 | 1 | STK |
| VSB48.170S2 | 48 | 170 | | | 0,700 | 1 | STK |
| VSB48.250S1 | 48 | 250 | | | 0,750 | 1 | STK |
| VSB48.250S2 | 48 | 250 | | | 0,850 | 1 | STK |
| VSB48.350S1 | 48 | 350 | | | 1,050 | 1 | STK |
| VSB48.350S2 | 48 | 350 | | | 1,150 | 1 | STK |

Geprüft nach EN 50085-2-2.

Zur Verbindung des Unterflurkanals mit Kabelleiter oder Kabelrinne.
Auch als Fallstück verwendbar.