
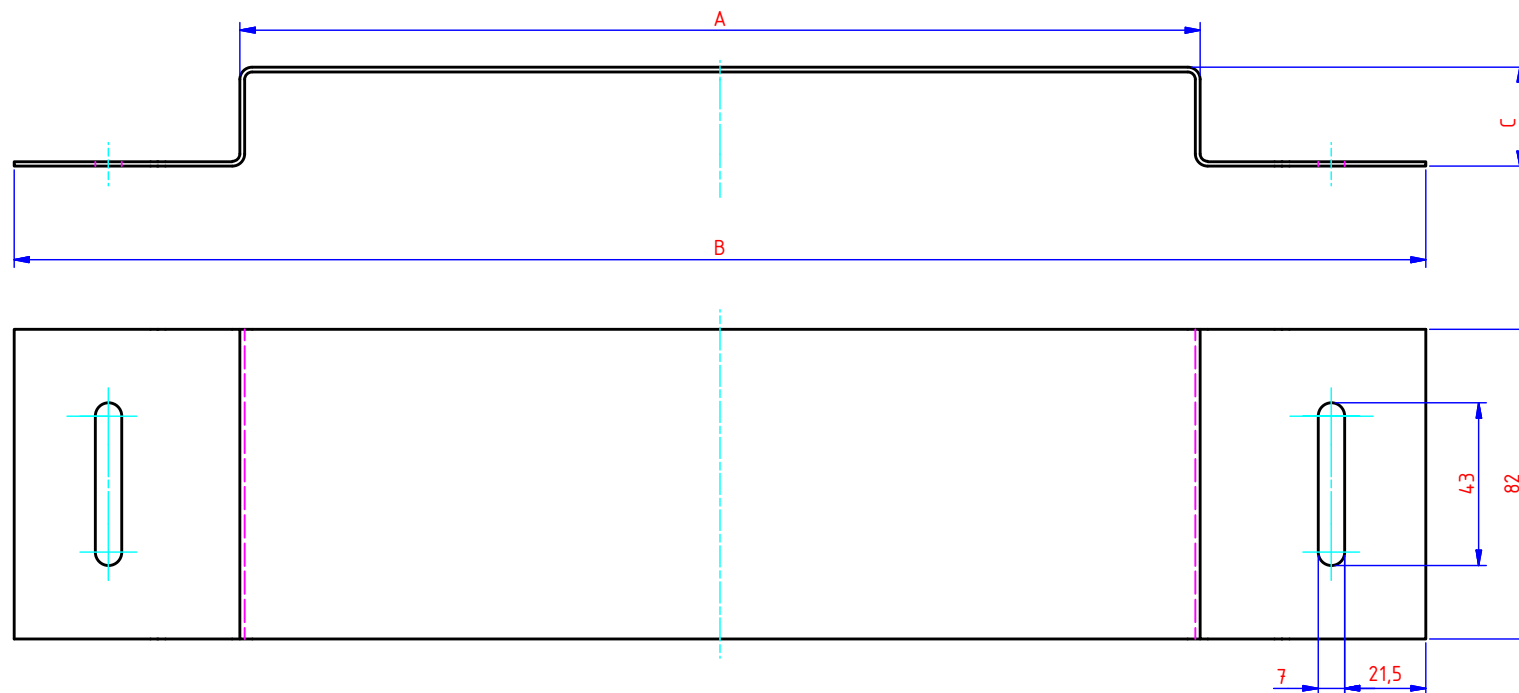


1 : 5

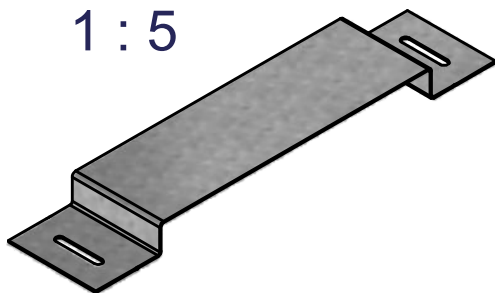

Ref.	A	B	C
VK28.170	174	293,5	26,25
VK28.250	254	373,5	26,25
VK28.350	354	473,5	26,25
VK28.370	374	493,5	26,25
VK38.170	174	293,5	36,25
VK38.250	254	373,5	36,25
VK38.350	354	473,5	36,25
VK38.370	374	493,5	36,25
VK48.170	174	293,5	46,25
VK48.250	254	373,5	46,25
VK48.350	354	473,5	46,25
VK48.370	374	493,5	46,25

NOT FOR PRODUCTION

Materiaaldikte: 1,25mm

1	A	Aanpassing vorm voor productie plooi bank (zie WF VK 28x170 07 jun 2010)	23/06/2010	
Aantal	Editie	Omschrijving van de wijziging	Datum	Visum

	Datum	Par.	Benaming
GET.	17/06/1998		Koppelbeugel voor vloergoot
VISUM			[VK28.250]
Materiaal:	Toleranties:	Norm:	I.S.O. SYMBOOL
1.0037 (Sendzimir)	-	VDE 0634 Teil 2	

VERGOKAN

Meersbloem Melden 16
9700 Oudenaarde

Tel: 055/31.83.35
Fax: 055/31.43.88

Schaal:	Tekening enkel m.b.v. CAD aanpassen	FORM	P. 1
1/2		A4	3 P.
PLANNUMMER			
45050			