


I4COMEGA290


Open suspension bracket

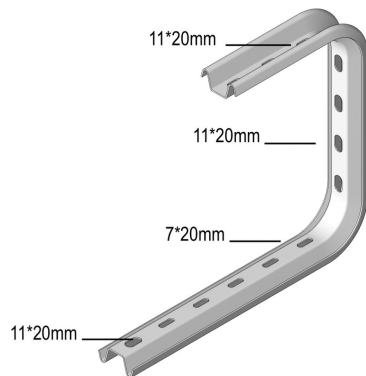

Useful for direct mounting to the ceiling or with threaded rod I6TIM 8 or I6TIM10.

Standard finish

Stainless Steel 304

		Max. load (in daN)							
100		70							
150		60							
200		60							
300		50							
400		50							
HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk		Stock	Unit
-	I4COMEGA290.100	290	145			0,52	12	v	STK
-	I4COMEGA290.150	290	195			0,56	12	v	STK
-	I4COMEGA290.200	290	245			0,62	12	v	STK
-	I4COMEGA290.300	290	345			0,82	6	v	STK
-	I4COMEGA290.400	290	445			0,93	6	v	STK

Fixing of the cable tray by I6VM6.20. Use the I4VOMEGA to avoid compression of the profile.