


I4COMEGA290

Open suspension bracket

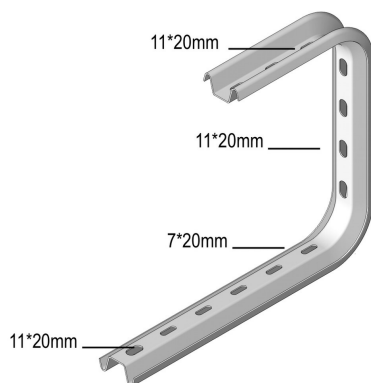

Useful for direct mounting to the ceiling or with threaded rod I6TIM 8 or I6TIM10.

Standard finish

Stainless Steel 304

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk		Stock	Unit
-	I4COMEGA290.100	290	145			0,520	12 v		STK
-	I4COMEGA290.150	290	195			0,560	12 v		STK
-	I4COMEGA290.200	290	245			0,620	12 v		STK
-	I4COMEGA290.300	290	345			0,820	6 v		STK
-	I4COMEGA290.400	290	445			0,930	6 v		STK

Fixing of the cable tray by I6VM6.20. Use the I4VOMEGA to avoid compression of the profile.