



I4KG60

Cable tray not perforated

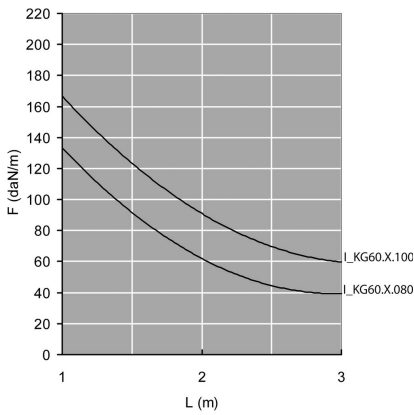


Fix with:

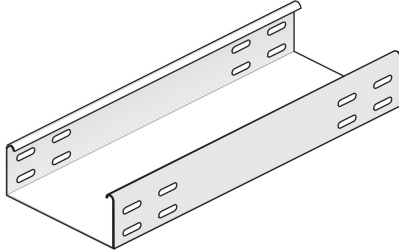

Toothed round
head bolt / flange
nut

I6VM



Joiner
I6V60.200

Smooth surface

Return flanges

Standard finish

Stainless Steel 304

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /m		Stock	Unit
-	I4KG60.100.080	60	100	0,8	3000	1,500	30		M
-	I4KG60.200.080	60	200	0,8	3000	2,170	30		M
-	I4KG60.300.080	60	300	0,8	3000	2,770	30		M
-	I4KG60.400.100	60	400	1	3000	4,460	30		M

LOAD DIAGRAM

Graph valid for I4KG60. This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 par 10.3.3 test type III with connection to 1/5 of the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100