



## I4KLLI60

### Cable ladder interlocking ends

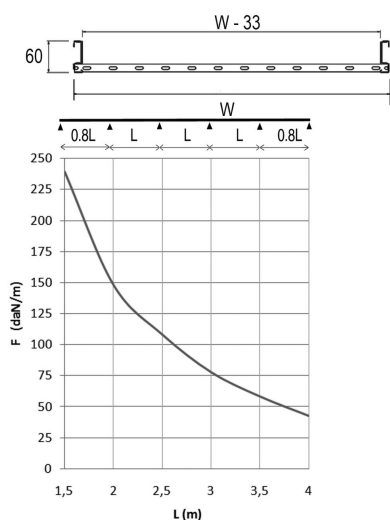

Fix with:

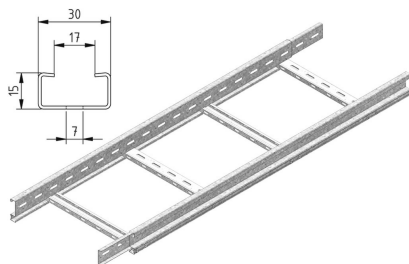

Toothed round  
head bolt / flange  
nut

I6VM

Side walls : perforated S-profile

Perforated C rungs

Standard finish

Stainless Steel 304

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /m		Stock	Unit
-	I4KLLI60.150	60	150		3000	2,110	30		M
-	I4KLLI60.200	60	200		3000	2,210	30		M
-	I4KLLI60.300	60	300		3000	2,400	30		M
-	I4KLLI60.400	60	400		3000	2,590	30		M
-	I4KLLI60.500	60	500		3000	2,790	30		M
-	I4KLLI60.600	60	600		3000	3,810	30		M

#### BELASTUNGSDIAGRAMM

Diese Grafik gibt die maximal zulässige, gleichmäßig verteilte horizontale Belastung für mehrfache Belastungsunterstützung an. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8x the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

#### CHARACTERISTICS

- lightweight
- strong
- interlocking
- partition (I4SLOS35) can be fixed to the cable ladder with a sliding nut (I6GM6 ) and pan head bolt (I6RB6.10)
- no further coupling holes are required if the cable ladder is cut
- use joiners (I6KLLKP60) and bolts (I6VM6.10) to join the cut lengths of cable ladder
- no joiners are required to attach accessories such as bends, tees etc.
- rungs are perforated to enable efficient attachment of cables.

#### TECHNICAL INFORMATION

Side walls are constructed from S profile with a return flange and are continuously perforated

Side walls are continuously perforated

C-profile rungs are fixed at 250 mm intervals

Rungs are mechanically attached to the side wall of the cable ladder

Rungs are alternately placed with openings upwards and downwards.