
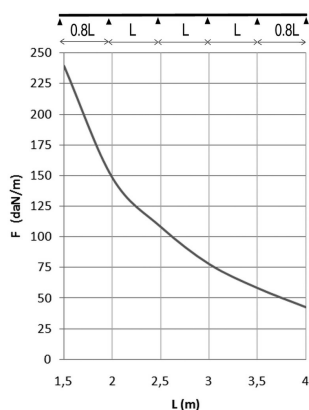


I4KLLI60

Cable ladder interlocking ends

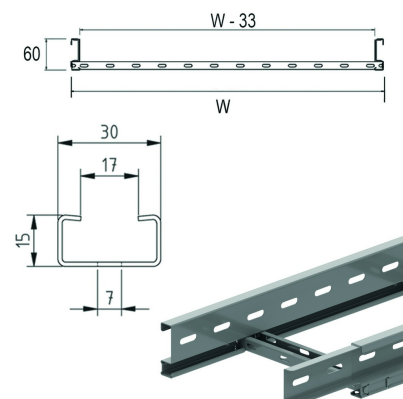

Side walls: perforated S-profile
Perforated C rungs 15 x 30

Usable inner height: 44 mm

Rung distance: 250 mm

To order: Length 6000 mm

To order: Width 700 - 1200 mm (increments of 100 mm)

Reference	mm	mm	mm	mm	kg/m	Unit
I4KLLI60.150	60	150	1	3000	2,110	M
I4KLLI60.200	60	200	1	3000	2,210	M
I4KLLI60.300	60	300	1	3000	2,400	M
I4KLLI60.400	60	400	1	3000	2,590	M
I4KLLI60.500	60	500	1	3000	2,790	M
I4KLLI60.600	60	600	1	3000	3,810	M

BELASTUNGSDIAGRAMM

This diagram illustrates the permissible uniformly distributed horizontal loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8x the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

CHARACTERISTICS

- lightweight
- strong
- interlocking
- partition (I6SLOS35) can be fixed to the cable ladder with a sliding nut (I6GM6) and pan head bolt (I6RB6.10)
- no further coupling holes are required if the cable ladder is cut
- use joiners (I6KLLKP60) and bolts (I6VM6.10) to join the cut lengths of cable ladder
- no joiners are required to attach accessories such as bends, tees etc.
- rungs are perforated to enable efficient attachment of cables.

TECHNICAL INFORMATION

Side walls are constructed from S profile with a return flange and are continuously perforated

Side walls are continuously perforated

C-profile rungs are fixed at 250 mm intervals

Rungs are mechanically attached to the side wall of the cable ladder

Rungs are alternately placed with openings upwards and downwards.

Pickled and passivated.

Fix with:



Toothed round head bolt / flange nut
I6VM