


I4WK


Welded bracket

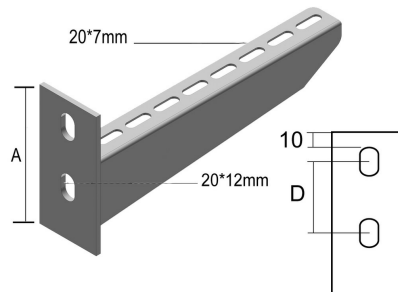

For direct fixing on the wall or on ceiling profiles.

Standard finish

Stainless Steel 304

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk		Stock	Unit
-	I4WK100	98	117			0,300	24		STK
-	I4WK150	102	167			0,360	24		STK
-	I4WK200	106	217			0,430	24		STK
-	I4WK300	114	317			0,730	1		STK
-	I4WK400	122	417			0,880	12		STK
-	I4WK500	130	517			1,300	6		STK
-	I4WK600	138	617			1,600	6		STK

For fixing on the ceiling profile, the necessary fixing set is to be ordered separately : sliding nut I6GM41M10 and bolt I6B10.20.

Max. load (in daN): Uniformly distributed load (UDL) over complete width of cantilever brackets.