
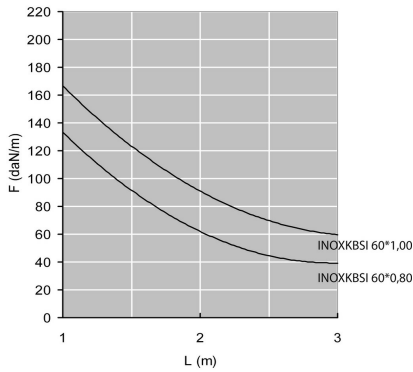


## I6KBSI60

### Cable tray with interlocking ends

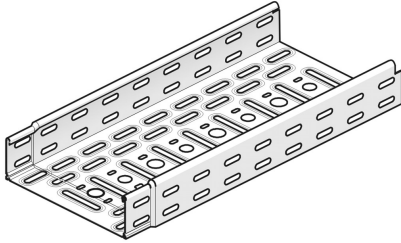

Interlocking ends  
Alternative perforations  
Return flanges

Standard finish

Stainless Steel 316

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /m		Stock	Unit
-	I6KBSI60.100.080	60	100	0,8	3000	1,300	3	v	M
-	I6KBSI60.200.080	60	200	0,8	3000	1,900	3	v	M
-	I6KBSI60.300.080	60	300	0,8	3000	2,400	3	v	M
-	I6KBSI60.400.100	60	400	1	3000	3,700	3	v	M

#### LOAD DIAGRAM

Graph valid for I6KBSI60. This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 par 10.3.3. test type III with connection to 1/5 of the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

Fix with:



Fast locking for  
KBSI  
KBV



Toothed round  
head bolt / flange  
nut  
I6VM