

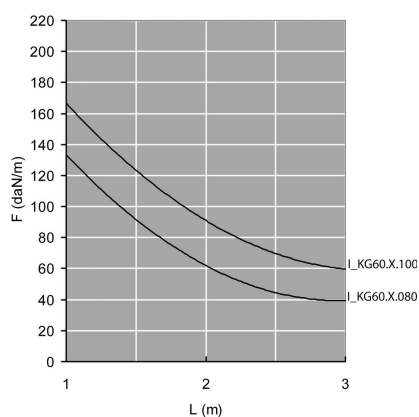


## I6KG60

### Cable tray not perforated

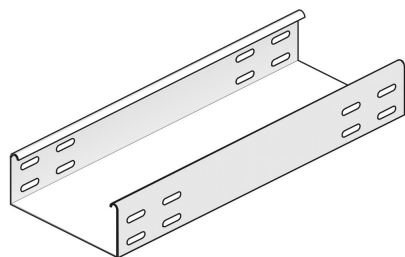

Fix with:



Joiner  
I6V60.200



Toothed round  
head bolt / flange  
nut  
I6VM

Smooth surface

Return flanges

Standard finish

Stainless Steel 316

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /m		Stock	Unit
-	I6KG60.100.080	60	100	0,8	3000	1,500	30		M
-	I6KG60.200.080	60	200	0,8	3000	2,170	30		M
-	I6KG60.300.080	60	300	0,8	3000	2,770	30		M
-	I6KG60.400.100	60	400	1	3000	4,460	30		M

#### LOAD DIAGRAM

Graph valid for I6KG60. This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 par 10.3.3 test type III with connection to 1/5 of the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100