


I6KLMVSB

Flexible (rising / low) bend for I6KLM

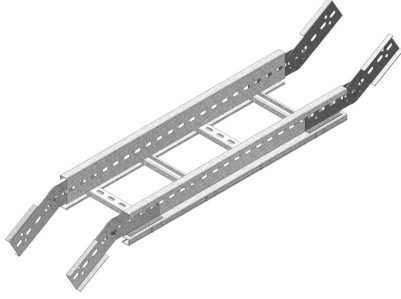

Standard finish

Stainless Steel 316

| HD | Reference | ↑ mm | ↔ mm | ≡ mm | ↔ mm | kg /stk | 📦 | Stock | Unit |
|----|-------------|---------|---------|---------|---------|------------|---|-------|------|
| - | I6KLMVSB200 | 125 | 218 | | 1135 | 9,275 | 1 | | STK |
| - | I6KLMVSB300 | 125 | 318 | | 1135 | 9,595 | 1 | | STK |
| - | I6KLMVSB400 | 125 | 418 | | 1135 | 9,915 | 1 | | STK |
| - | I6KLMVSB500 | 125 | 518 | | 1135 | 10,235 | 1 | | STK |
| - | I6KLMVSB600 | 125 | 618 | | 1135 | 10,559 | 1 | | STK |

Fix with:




Minimum number bolts and nuts: 8 pieces.

Round head
square neck bolt
(DIN 603)

Nut (DIN 934)
I6M

I6RBK



Giant washer
(DIN 125-1 A)

I6RO