
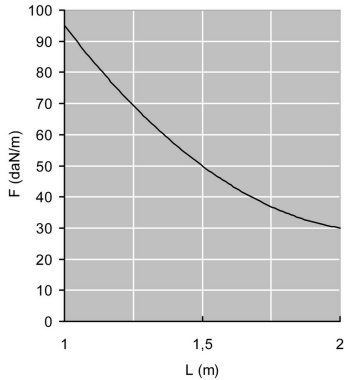



I6VF

Wire cable tray for heavy duty



Screen: 50x100 mm
Thread: 4.50 mm

Standard finish

Stainless Steel 316

| HD | Reference | ↑ mm | ↔ mm | → ← mm | ↔↔ mm | kg/m | 📦 | Stock | Unit |
|----|-------------------|---------|---------|------------|----------|-------|----|-------|------|
| - | I6VF60.050 | 60 | 50 | | 3000 | 0,690 | 30 | X | M |
| - | I6VF60.100 | 60 | 97 | | 3000 | 1,010 | 30 | X | M |
| - | I6VF60.200 | 60 | 197 | | 3000 | 1,263 | 30 | X | M |
| - | I6VF60.300 | 60 | 297 | | 3000 | 1,660 | 30 | X | M |
| - | I6VF60.400 | 60 | 397 | | 3000 | 2,040 | 30 | X | M |
| - | I6VF60.500 | 60 | 497 | | 3000 | 2,427 | 3 | X | M |

LOAD DIAGRAM

Graph valid for I6VF60. This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 par 10.3.3 test type III with connection to 1/5 of the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

Pickled and passivated.