
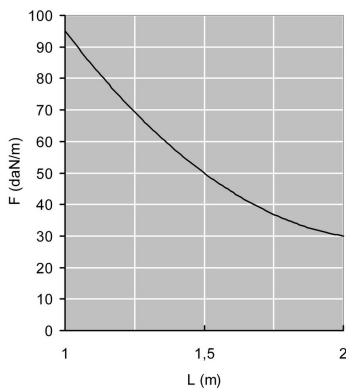


I6VF60

Wire cable tray for heavy duty

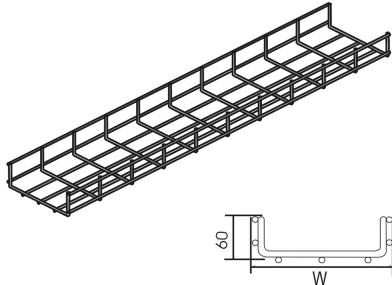

Screen: 50x100 mm

Thread: 4.50 mm

Standard finish

Stainless Steel 316

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /m		Stock	Unit
-	I6VF60.050	60	50		3000	0,690	3	v	M
-	I6VF60.100	60	97		3000	1,010	3	v	M
-	I6VF60.200	60	197		3000	1,263	3	v	M
-	I6VF60.300	60	297		3000	1,660	3	v	M
-	I6VF60.400	60	397		3000	2,040	3	v	M

LOAD DIAGRAM

Graph valid for I6VF60. This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 par 10.3.3 test type III with connection to 1/5 of the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

Fix with:



Support joiner for
wire cable tray

I6VFKS



Joining clamp

I6VFK



Joiner for wire
cable tray

I6KPVF