


I6WSU

Universal support bracket

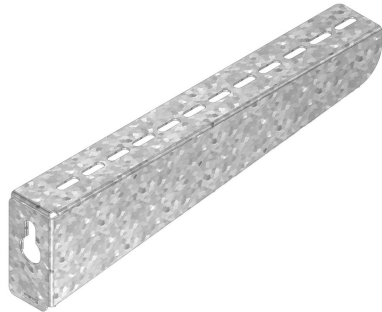

For direct fixing on the wall

Standard finish

Stainless Steel 316

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk		Stock	Unit
-	I6WSU100	60	128			0,208	24	v	STK
-	I6WSU150	66	178			0,291	24	v	STK
-	I6WSU200	73	228			0,378	24	v	STK
-	I6WSU250	79	278			0,469	12	v	STK
-	I6WSU300	85	328			0,563	12	v	STK
-	I6WSU400	98	428			0,763	12	v	STK
-	I6WSU500	110	528			0,978	6	v	STK
-	I6WSU600	122	628			1,209	6	v	STK

Max. load (in daN): uniformly distributed over complete width of cantilever brackets.