


## HDKSR60

### Cable ladder DAVID tubular rungs

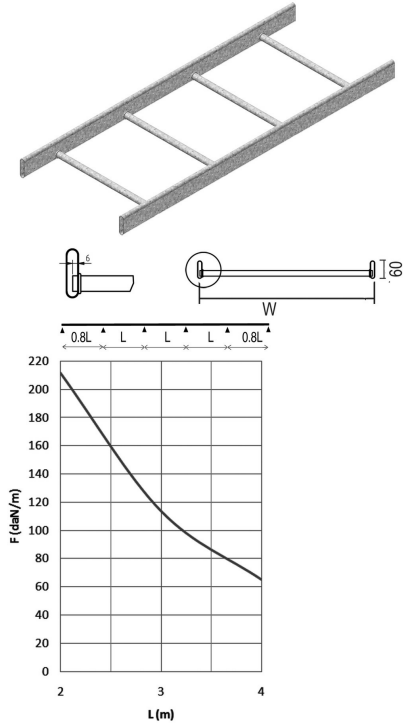

Standard finish

Hot-dip galvanised

Optional finish

Duplex system

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /m		Stock	Unit
-	HDKSR60.200	60	200		6000	2,7	60		M
-	HDKSR60.300	60	300		6000	2,94	60		M
-	HDKSR60.400	60	400		6000	3,18	60		M
-	HDKSR60.500	60	500		6000	3,43	60		M
-	HDKSR60.600	60	600		6000	3,67	60		M

#### LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed horizontal loads applied to multiple supports. They comply with IEC 61537 par 10.3.3 test type III with connection to 1/5 of the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

#### CHARACTERISTICS

- lightweight
- rounded tubular side-walls eliminate the risk of cable damage.
- side walls have closed ends.
- does not accumulate dust