



KLL85

Cable ladder

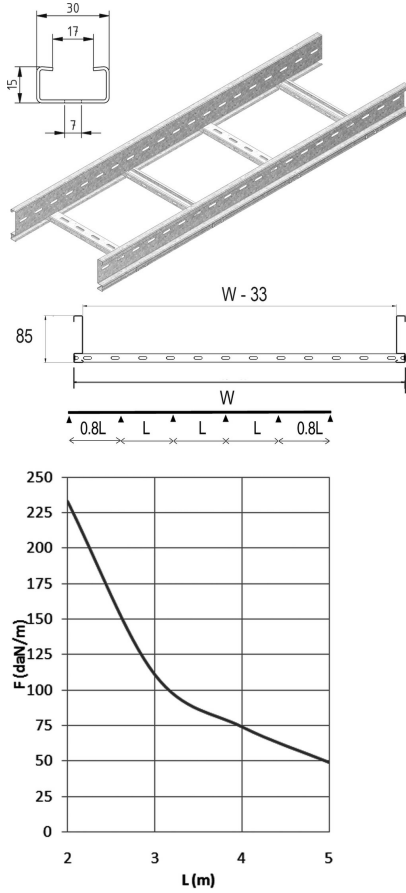

Fix with:

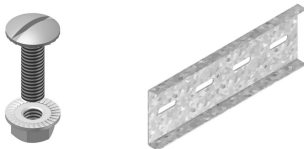

Toothed round head bolt / flange nut

Joiner for KLL KLLKP

VM

Side walls: perforated S-profile
Perforated C rungs 15x30

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish	Coating
Optional finish	length 6000 mm

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /m	📦	Stock	Unit
HD	KLL85.200	85	200		3000	2,687	24		M
HD	KLL85.300	85	300		3000	2,925	24		M
HD	KLL85.400	85	400		3000	3,162	24		M
HD	KLL85.500	85	500		3000	3,400	24		M
HD	KLL85.600	85	600		3000	3,638	24		M
HD	KLL85.800	85	800		3000	4,113	24		M
HD	KLL85.1000	85	1000		3000	4,588	24		M

LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed horizontal loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8x the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = $L/100$

CHARACTERISTICS

- lightweight
- strong
- partition (SLOS60) can be fixed to the cable ladder with a sliding nut (GM6) and pan head bolt (RB6.10)
- no further coupling holes are required if the cable ladder is cut.
- rungs are perforated to enable efficient attachment of cables.

TECHNICAL INFORMATION

Side walls are constructed from S profile with a return flange and are continuously perforated.

C-profile rungs are fixed at 250 mm intervals.

Rungs are mechanically attached to the side wall of the cable ladder.

Rungs are alternately placed with openings upwards and downwards.