


KLLI60.6


Cable ladder interlocking ends

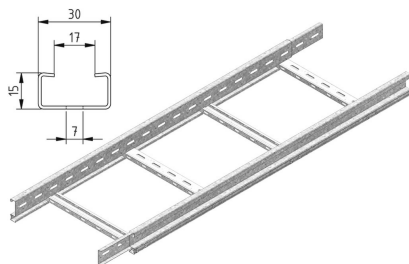


Side walls: perforated S-profile

Perforated C rungs 15x30

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish	Coating

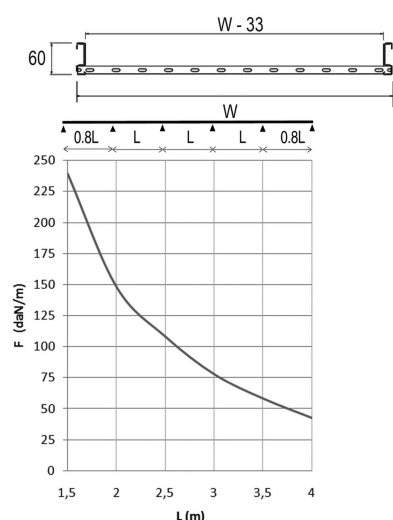

Fix with:



Toothed round
head bolt / flange
nut

VM

Round head
square neck bolt
/ flange nut

VMK

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /m	📦	Stock	Unit
HD	KLLI60.150.6	60	150		6000	2,142	30		M
HD	KLLI60.200.6	60	200		6000	2,261	30		M
HD	KLLI60.300.6	60	300		6000	2,499	30		M
HD	KLLI60.400.6	60	400		6000	2,736	30		M
HD	KLLI60.500.6	60	500		6000	2,974	30		M
HD	KLLI60.600.6	60	600		6000	3,212	30		M

LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed horizontal loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8x the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

CHARACTERISTICS

- lightweight
- strong
- interlocking
- partition (SLOS35) can be fixed to the cable ladder with a sliding nut (GM6) and pan head bolt (RB6.10)
- no further coupling holes are required if the cable ladder is cut
- use joiners (KLLKP60) and bolts (VM6.10) to join the cut lengths of cable ladder
- no joiners are required to attach accessories such as bends, tees etc.
- rungs are perforated to enable efficient attachment of cables.