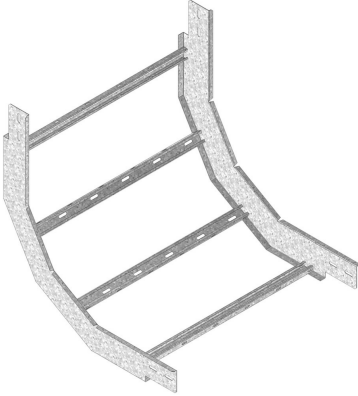



KLLSB**Internal riser for KLL**

Fix with:

Toothed round
head bolt / flange
nut

VM

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish	Coating

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk		Stock	Unit
HD	KLLSB60.150	60	141			1,528	1		STK
HD	KLLSB60.200	60	191			1,629	1		STK
HD	KLLSB60.300	60	291			1,83	1		STK
HD	KLLSB60.400	60	391			2,032	1		STK
HD	KLLSB60.500	60	491			2,234	1		STK
HD	KLLSB60.600	60	591			2,435	1		STK
HD	KLLSB85.200	85	198			2,083	1		STK
HD	KLLSB85.300	85	298			2,284	1		STK
HD	KLLSB85.400	85	398			2,486	1		STK
HD	KLLSB85.500	85	498			2,688	1		STK
HD	KLLSB85.600	85	598			2,889	1		STK
HD	KLLSB110.200	110	198			2,755	1		STK
HD	KLLSB110.300	110	298			2,956	1		STK
HD	KLLSB110.400	110	398			3,158	1		STK
HD	KLLSB110.500	110	498			3,36	1		STK
HD	KLLSB110.600	110	598			3,561	1		STK

Minimum number bolts and nuts VM6.10: 8 pieces.