


KLLSB

Internal riser for KLL

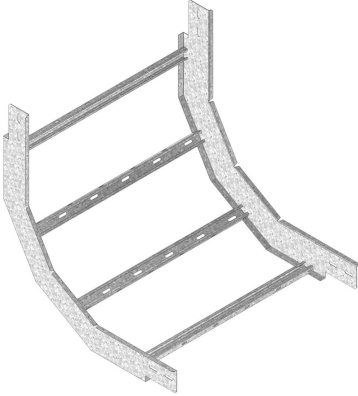


Fix with:

Toothed round
head bolt / flange
nut

VM

| | |
|-----------------|--------------------|
| Standard finish | Pre-galvanised |
| Optional finish | Hot-dip galvanised |
| Optional finish | Coating |

| HD | Reference | ↑ mm | ↔ mm | ≡ mm | ↔ mm | kg /stk |  | Stock | Unit |
|----|--------------|---------|---------|---------|---------|------------|---|-------|------|
| HD | KLLSB60.150 | 60 | 141 | | | 1,528 | 1 | | STK |
| HD | KLLSB60.200 | 60 | 191 | | | 1,629 | 1 | | STK |
| HD | KLLSB60.300 | 60 | 291 | | | 1,830 | 1 | | STK |
| HD | KLLSB60.400 | 60 | 391 | | | 2,032 | 1 | | STK |
| HD | KLLSB60.500 | 60 | 491 | | | 2,234 | 1 | | STK |
| HD | KLLSB60.600 | 60 | 591 | | | 2,435 | 1 | | STK |
| HD | KLLSB85.200 | 85 | 198 | | | 2,083 | 1 | | STK |
| HD | KLLSB85.300 | 85 | 298 | | | 2,284 | 1 | | STK |
| HD | KLLSB85.400 | 85 | 398 | | | 2,486 | 1 | | STK |
| HD | KLLSB85.500 | 85 | 498 | | | 2,688 | 1 | | STK |
| HD | KLLSB85.600 | 85 | 598 | | | 2,889 | 1 | | STK |
| HD | KLLSB110.200 | 110 | 198 | | | 2,755 | 1 | | STK |
| HD | KLLSB110.300 | 110 | 298 | | | 2,956 | 1 | | STK |
| HD | KLLSB110.400 | 110 | 398 | | | 3,158 | 1 | | STK |
| HD | KLLSB110.500 | 110 | 498 | | | 3,360 | 1 | | STK |
| HD | KLLSB110.600 | 110 | 598 | | | 3,561 | 1 | | STK |

Minimum number bolts and nuts VM6.10: 8 pieces.