


KLLVSB

Flexible (rising / low) bend for KLL




Fix with:

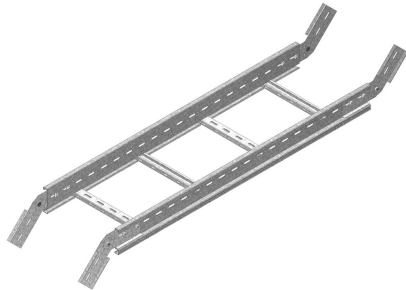

Toothed round
head bolt / flange
nut

VM

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish	Coating

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk		Stock	Unit
HD	KLLVSB60.150	60	150		1040	2,83	1		STK
HD	KLLVSB60.200	60	200		1040	2,93	1		STK
HD	KLLVSB60.300	60	300		1040	3,12	1		STK
HD	KLLVSB60.400	60	400		1040	3,31	1		STK
HD	KLLVSB60.500	60	500		1040	3,51	1		STK
HD	KLLVSB60.600	60	600		1040	3,66	1		STK
HD	KLLVSB85.200	85	200		1070	3,32	1		STK
HD	KLLVSB85.300	85	300		1070	3,52	1		STK
HD	KLLVSB85.400	85	400		1070	3,71	1		STK
HD	KLLVSB85.500	85	500		1070	3,9	1		STK
HD	KLLVSB85.600	85	600		1070	4,05	1		STK
HD	KLLVSB110.200	110	200		1090	4,33	1		STK
HD	KLLVSB110.300	110	300		1090	4,53	1		STK
HD	KLLVSB110.400	110	400		1090	4,72	1		STK
HD	KLLVSB110.500	110	500		1090	4,91	1		STK
HD	KLLVSB110.600	110	600		1090	5,06	1		STK

Minimum number bolts and nuts VM6.10: 8 pieces.