


## KLLVSB

### Flexible (rising / low) bend for KLL



Fix with:

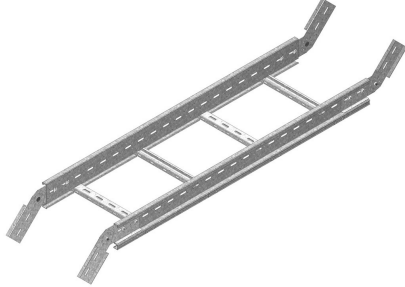

Toothed round  
head bolt / flange  
nut

VM

|                 |                    |
|-----------------|--------------------|
| Standard finish | Pre-galvanised     |
| Optional finish | Hot-dip galvanised |
| Optional finish | Coating            |

| HD | Reference     | ↑<br>mm | ↔<br>mm | ≡<br>mm | ↔<br>mm | kg<br>/stk |   | Stock | Unit |
|----|---------------|---------|---------|---------|---------|------------|---|-------|------|
| HD | KLLVSB60.150  | 60      | 150     |         | 1040    | 2,830      | 1 |       | STK  |
| HD | KLLVSB60.200  | 60      | 200     |         | 1040    | 2,930      | 1 |       | STK  |
| HD | KLLVSB60.300  | 60      | 300     |         | 1040    | 3,120      | 1 |       | STK  |
| HD | KLLVSB60.400  | 60      | 400     |         | 1040    | 3,310      | 1 |       | STK  |
| HD | KLLVSB60.500  | 60      | 500     |         | 1040    | 3,510      | 1 |       | STK  |
| HD | KLLVSB60.600  | 60      | 600     |         | 1040    | 3,660      | 1 |       | STK  |
| HD | KLLVSB85.200  | 85      | 200     |         | 1070    | 3,320      | 1 |       | STK  |
| HD | KLLVSB85.300  | 85      | 300     |         | 1070    | 3,520      | 1 |       | STK  |
| HD | KLLVSB85.400  | 85      | 400     |         | 1070    | 3,710      | 1 |       | STK  |
| HD | KLLVSB85.500  | 85      | 500     |         | 1070    | 3,900      | 1 |       | STK  |
| HD | KLLVSB85.600  | 85      | 600     |         | 1070    | 4,050      | 1 |       | STK  |
| HD | KLLVSB110.200 | 110     | 200     |         | 1090    | 4,330      | 1 |       | STK  |
| HD | KLLVSB110.300 | 110     | 300     |         | 1090    | 4,530      | 1 |       | STK  |
| HD | KLLVSB110.400 | 110     | 400     |         | 1090    | 4,720      | 1 |       | STK  |
| HD | KLLVSB110.500 | 110     | 500     |         | 1090    | 4,910      | 1 |       | STK  |
| HD | KLLVSB110.600 | 110     | 600     |         | 1090    | 5,060      | 1 |       | STK  |

Minimum number bolts and nuts VM6.10: 8 pieces.