


## KLLX

### Cross-over for KLL



Fix with:

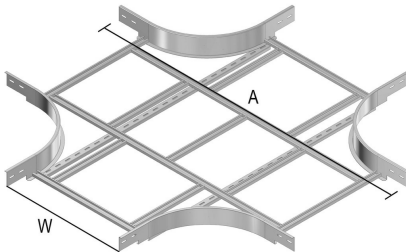


Toothed round  
head bolt / flange  
nut

VM

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish	Coating

W (mm)	150	200	300	400	500	600
A (mm)	1021	1071	1171	1271	1371	1471

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk		Stock	Unit
HD	KLLX60.150	60	141			3,131	1		STK
HD	KLLX60.200	60	191			3,232	1		STK
HD	KLLX60.300	60	291			4,421	1		STK
HD	KLLX60.400	60	391			4,875	1		STK
HD	KLLX60.500	60	491			5,329	1		STK
HD	KLLX60.600	60	591			5,782	1		STK
HD	KLLX85.200	85	198			4,032	1		STK
HD	KLLX85.300	85	298			5,221	1		STK
HD	KLLX85.400	85	398			5,675	1		STK
HD	KLLX85.500	85	498			6,129	1		STK
HD	KLLX85.600	85	598			6,582	1		STK
HD	KLLX110.200	110	198			4,796	1		STK
HD	KLLX110.300	110	298			5,985	1		STK
HD	KLLX110.400	110	398			6,439	1		STK
HD	KLLX110.500	110	498			6,893	1		STK
HD	KLLX110.600	110	598			7,346	1		STK

Minimum number bolts and nuts VM6.10: 16 pieces.