



SLOS

Bolt-in partition

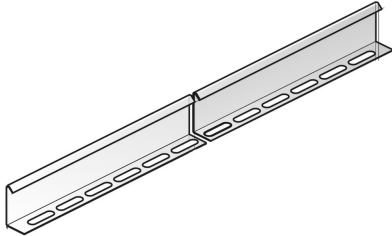

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish	Coating

HD	Reference	↑ mm	→ mm	≡ mm	↔ mm	kg /m		Stock	Unit
HD	SLOS35	35			3000	0,330	150	v	M
HD	SLOS60	60			3000	0,511	120	v	M
HD	SLOS85	85			3000	0,680	60	v	M

Fix with:



Fixing set: 1 per metre.

Toothed round
head bolt

RB