

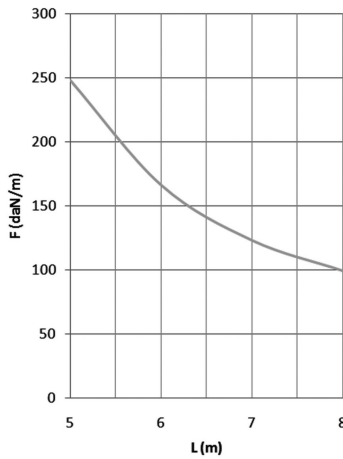


## KLZ

### Cable ladder height 150

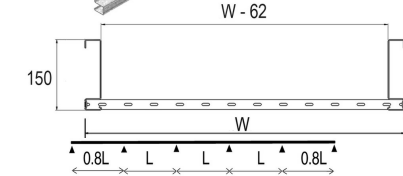

Fix with:

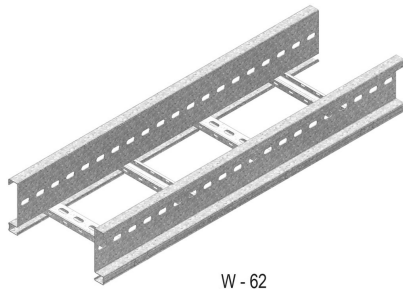


Flange nut (DIN 6923)

Round head square neck bolt (DIN 603)

RM

RBK



Joiner for KLZ

KLZKP

Cable ladder for large support distances up to 8 metres  
Perforated C rungs 41x21

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish	Coating
Optional finish	length 3000 mm or 9000 mm

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /m	📦	Stock	Unit
HD	KLZ200	150	218		6000	7,520	48		M
HD	KLZ300	150	318		6000	7,840	48		M
HD	KLZ400	150	418		6000	8,160	48		M
HD	KLZ500	150	518		6000	8,480	48		M
HD	KLZ600	150	618		6000	8,810	48		M
HD	KLZ800	150	818		6000	9,950	48		M
HD	KLZ1000	150	1018		6000	10,140	48		M

#### LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed horizontal loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8x the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/200

#### CHARACTERISTICS

- strong
- usable inner height 127 mm, ideal for large diameter cables
- no further coupling holes are required if the cable ladder is cut
- no joiners are required to attach accessories such as bends, tees etc.
- rungs are perforated to enable efficient attachment of cables
- partition (SLOS110) can be fixed to the cable ladder with a sliding nut (GM41M6) and pan head bolt (RB6.20).

#### TECHNICAL INFORMATION

Side walls are constructed from S profile with a return flange and are continuously perforated

- C-profile rungs are fixed at 250 mm intervals.
- rungs are mechanically attached to the side wall of the cable ladder.
- rungs are alternately placed with openings upwards and downwards.