


# KBS110.6

## Perforated cable tray



Alternative perforation  
Return flanges  
Support distance up to 6 meter


Reference	↔ mm	↔ mm	→  ← mm	↔ mm	kg/m	Unit
<b>KBS110.200.150.6</b>	110	200	1,5	6000	4,300	24 M
<b>KBS110.300.150.6</b>	110	300	1,5	6000	5,280	24 M
<b>KBS110.400.150.6</b>	110	400	1,5	6000	6,250	24 M
<b>KBS110.500.150.6</b>	110	500	1,5	6000	7,230	24 M
<b>KBS110.600.150.6</b>	110	600	1,5	6000	8,210	24 M

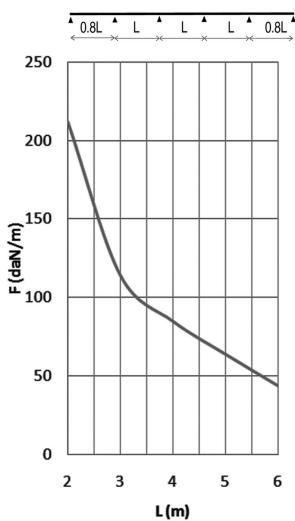

### Fix with:



Toothed round head bolt / flange  
nut  
VM



### Alternative perforations for:

- better fixing to supports
- very useful for attaching cables.

### TECHNICAL INFORMATION

The perforation scheme differs according to the width.

Alternative perforation beginning at 200 mm.

Round holes of Ø 16 mm and Ø 19.5 mm provided as opening for the fitting of a gland.



Joiner for  
KBS110.6  
KPW