
KBS35
Perforated cable tray



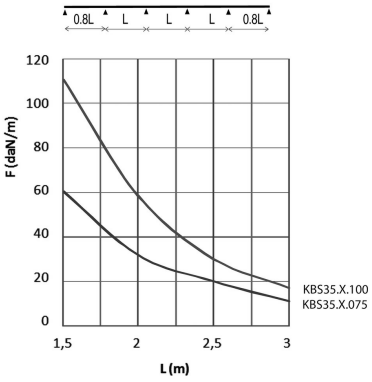

Alternative perforation
Return flanges

Reference	↕ mm	↔ mm	→‖← mm	⇄ mm	kg/m	📦	Unit
KBS35.050.075	35	50	0,75	3000	0,680	150	M

LOAD DIAGRAM
This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span.

F = max. admissible load (daN/m)
L = support distance (m)
Max. deflection (m) = L/100

CHARACTERISTICS
Embedded perforations for:
- extra load capacity
- better aeration
- better stability
- better condensation drainage

Alternative perforations for:
- better fixing to supports
- very useful for attaching cables

TECHNICAL INFORMATION
KBS35.050.075: no knock-out facility (pre-shaped holes).

Fix with:



Joiner for fast mounting
V35



Joiner
V35.200



Toothed round head bolt / flange nut
VM