

KBSCL35
Cable Tray Clickable



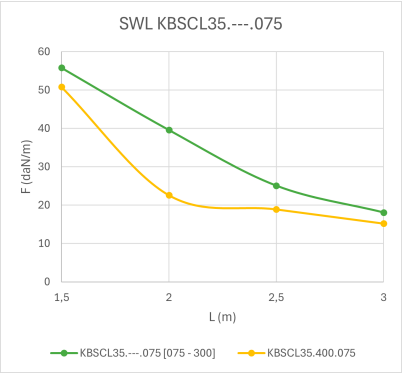

Clicking ends
Alternative perforations
Return flanges

Reference	Finish	↕ mm	↔ mm	→‖← mm	⇄ mm	kg/m	📦	Unit
KBSCL35.075.075	SZ	35	75	0,75	3000	0,790	60	M
KBSCL35.100.075	SZ	35	100	0,75	3000	0,960	60	M
KBSCL35.150.075	SZ	35	150	0,75	3000	1,220	60	M
KBSCL35.200.075	SZ	35	200	0,75	3000	1,480	60	M
KBSCL35.300.075	SZ	35	300	0,75	3000	1,990	60	M
KBSCL35.400.075	SZ	35	400	0,75	3000	2,520	60	M

LOAD DIAGRAM
This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span.

F = max. admissible load (daN/m)
L = support distance (m)
Max. deflection (m) = L/100

Other lengths upon request: min. 1.95 m / max. 6 m in 150 mm steps.

FEATURES
- Clickable.
- The simplest jointing system, with a single movement.
- Rapid - Just click and ready for the next joint. Immediate alignment at the same time.
- Strong - As strong as a bolted joint.
- Reliable - Maximum load with snap-fit joint. Multiple jointing options available.
- Cost-effective - Working faster results in immediate time and cost savings.
- High standard - Wide and complete range of accessories available.

Etched perforations for:
- better stability
- extra load-bearing capacity
- better cooling

Longitudinal and transverse perforations for:
- better fixing to the support
- convenient cable bundling

Additional equipotential bonding available by 1. snap-fit joint, 2. bolted joint and 3. push-through lip in the bottom.

TECHNICAL INFORMATION
Perforation pattern varies according to width.
Transverse perforation as from 200 mm width.
16 mm dia. and 20.4 mm dia. openings to be provided for fitting a gland.

Legend finish
- SZ = Sendzimir