
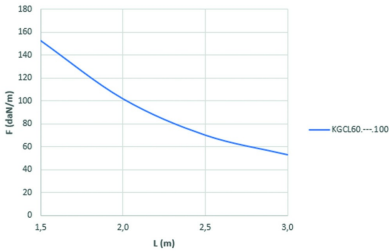


# KGCL60S

## KGCL with SIN

Clickable ends  
 Closed bottom  
 Prefabricated click fold

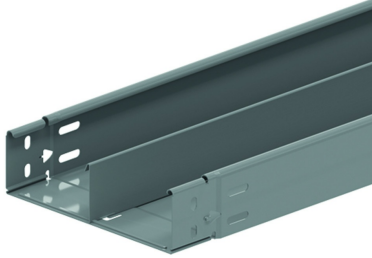

	1,5	2,0	2,5	3,0
KGCL60.---.100	152,5	101,7	69,9	52,8

Reference	Finish	↑ mm	↔ mm	→  ← mm	↔ mm	kg/m	Unit	Unit
<b>KGCL60.075.100S13</b>	SZ	60	75	1	3000	2,211	30	M
<b>KGCL60.100.100S12</b>	SZ	60	100	1	3000	2,411	30	M
<b>KGCL60.100.100S13</b>	SZ	60	100	1	3000	2,411	30	M
<b>KGCL60.150.100S12</b>	SZ	60	150	1	3000	2,811	30	M
<b>KGCL60.150.100S13</b>	SZ	60	150	1	3000	2,811	30	M
<b>KGCL60.150.100S23</b>	SZ	60	150	1	3000	3,322	30	M
<b>KGCL60.200.100S12</b>	SZ	60	200	1	3000	3,211	30	M
<b>KGCL60.200.100S13</b>	SZ	60	200	1	3000	3,211	30	M
<b>KGCL60.200.100S23</b>	SZ	60	200	1	3000	3,722	30	M
<b>KGCL60.300.100S12</b>	SZ	60	300	1	3000	4,011	30	M
<b>KGCL60.300.100S13</b>	SZ	60	300	1	3000	4,011	30	M
<b>KGCL60.300.100S23</b>	SZ	60	300	1	3000	4,522	30	M
<b>KGCL60.400.100S12</b>	SZ	60	400	1	3000	4,811	30	M
<b>KGCL60.400.100S13</b>	SZ	60	400	1	3000	4,811	30	M
<b>KGCL60.400.100S23</b>	SZ	60	400	1	3000	5,322	30	M
<b>ZMKGCL60.075.10S12</b>	DF	60	75	1	3000	2,211	30	M
<b>ZMKGCL60.075.10S13</b>	DF	60	75	1	3000	2,211	30	M
<b>ZMKGCL60.100.10S12</b>	DF	60	100	1	3000	2,411	30	M
<b>ZMKGCL60.100.10S13</b>	DF	60	100	1	3000	2,411	30	M
<b>ZMKGCL60.150.10S12</b>	DF	60	150	1	3000	2,811	30	M
<b>ZMKGCL60.150.10S13</b>	DF	60	150	1	3000	2,811	30	M
<b>ZMKGCL60.150.10S23</b>	DF	60	150	1	3000	3,322	30	M
<b>ZMKGCL60.200.10S12</b>	DF	60	200	1	3000	3,211	30	M
<b>ZMKGCL60.200.10S13</b>	DF	60	200	1	3000	3,211	30	M
<b>ZMKGCL60.200.10S23</b>	DF	60	200	1	3000	3,722	30	M
<b>ZMKGCL60.300.10S12</b>	DF	60	300	1	3000	4,011	30	M
<b>ZMKGCL60.300.10S13</b>	DF	60	300	1	3000	4,011	30	M
<b>ZMKGCL60.300.10S23</b>	DF	60	300	1	3000	4,522	30	M
<b>ZMKGCL60.400.10S12</b>	DF	60	400	1	3000	4,811	30	M
<b>ZMKGCL60.400.10S13</b>	DF	60	400	1	3000	4,811	30	M
<b>ZMKGCL60.400.10S23</b>	DF	60	400	1	3000	5,322	30	M

### LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

S12: one partition in the middle of the cable tray

S13: one partition at right or the left of the cable tray

S23: two partitions

### Legend finish



- SZ = Sendzimir
- DF = Defender