


DR15.30
Supporting profile

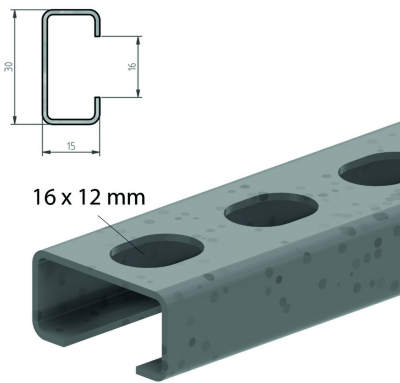

For wall and ceiling constructions

Standard finish				Pre-galvanised					
Optional finish				Hot-dip galvanised					
Optional finish PE				Coating					
HD	Reference	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Stock	Unit
HD	DR100	15	30		100	0,060	10	X	STK
HD	DR150	15	30		150	0,080	10	X	STK
HD	DR200	15	30		200	0,110	10	X	STK
HD	DR250	15	30		250	0,130	10	X	STK
HD	DR300	15	30		300	0,160	10	X	STK
HD	DR350	15	30		350	0,190	10	X	STK
HD	DR15.30.2000	15	30		2000	0,600	40		M

Max. support distance = 300 mm.
Use of cable clamps, type H.
Applicable with all DIN 4102-12 certified cables.
Fixing to the ceiling or wall with certified concrete anchors.
Distance between the anchors max. 250 mm.