



COMEGA290

Open suspension bracket

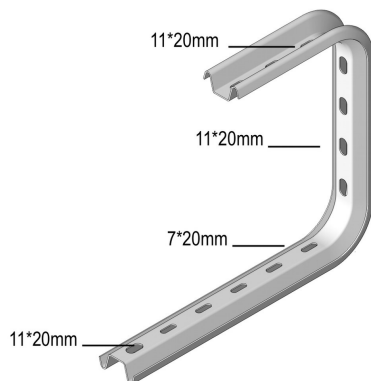

Standard finish

Pre-galvanised

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk		Stock	Unit
-	COMEGA290.150	290	195			0,560	12	v	STK
-	COMEGA290.200	290	245			0,620	12	v	STK
-	COMEGA290.250	290	295			0,760	6	v	STK
-	COMEGA290.300	290	345			0,820	6	v	STK
-	COMEGA290.400	290	445			0,930	6	v	STK

To order per full packaging.

Ends held up by threaded rod TIM10.

Use the VOMEGA to avoid compression of the profile.

When ordering, add 100 mm to the width. E.g. KBS 300 mm: use COMEGA290.400.