



HDWK

Welded bracket

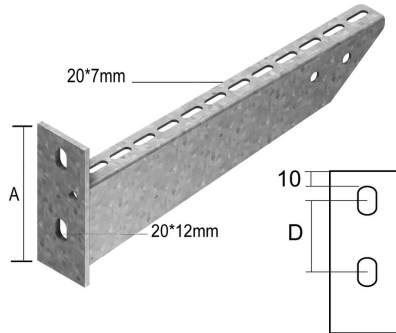


Fix with:



Nut (DIN 934)
M

Flat giant washer
(DIN 9021)
CRO



Bolt (DIN 933)
B

Standard finish

Hot-dip galvanised

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk		Stock	Unit
-	HDWK100	106	117			0,300	12	v	STK
-	HDWK150	112	167			0,360	12	v	STK
-	HDWK200	116	217			0,430	12	v	STK
-	HDWK250	120	267			0,530	12	v	STK
-	HDWK300	125	317			0,730	12	v	STK
-	HDWK400	134	417			0,880	6	v	STK

To order per full packaging.

For symmetrical mounting, use HDB12.50 + HDCRO12 + HDM12.