


VZBG

Hermann S Multi Cable Support E30-E90

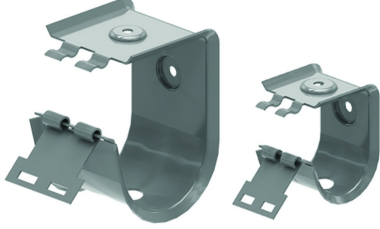

| Reference | ↕ mm | ↔ mm | → ← mm | ↔ mm | kg/stk | 📦 | Unit |
|--------------|---------|---------|------------|---------|--------|----|------|
| VZBG | | | | | 0,143 | 50 | STK |
| VZBGS | | | | | 0,123 | 50 | STK |

VZBG: load: max. 6 kg/m; distance: max. 0.8 m
 VZBGS: load: max. 3 kg/m; distance: max. 0.8 m

Supplied with fire-resistant KDM 30 mm striking pin
 The bracket is ideal for securely installing a small number of cables with function retention.

Function retention is achieved with Keram type cables:

- (N)HXH / (N)HXH-CL / (N)HXCH-FE180/E30-E60
- (N)HXH / (N)HXCH-FE180/E90
- JE-H(St)H-FE180/E30-E90
- JE-H(St)HRH-FE180/E30-E90

Component name in certificate SHUD
 Stainless steel 304 version available on request.