


## IOK-/IOKR Filler edge for cover

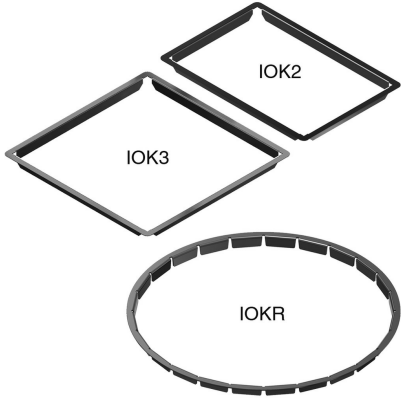

| Reference   | ↕<br>mm | ↔<br>mm | →  ←<br>mm | ↔<br>mm | kg/stk | 📦 | Unit |
|-------------|---------|---------|------------|---------|--------|---|------|
| <b>IOK2</b> | 16      | 213     | 1          | 288     | 0,179  | 4 | STK  |
| <b>IOK3</b> | 16      | 288     | 1          | 288     | 0,198  | 4 | STK  |
| <b>IOKR</b> | 16      | 347     | 1          | 347     | 0,294  | 4 | STK  |

Stainless filler rim is advised to be used for oversized floor cut-outs between 272 and 275 mm (square and rectangular), between 197 and 200 mm (rectangular) and between diameter 332 and 335 mm (round).

IOK2: Filler rim for covers BDVKK2, KDVKK2  
 IOK3: Filler rim for covers BDVKK3, KDVKK3  
 IOKR: Filler rim for covers BDRKK3, KDRKK3