


KDVITV3  
Hinged cover square flat stainless steel

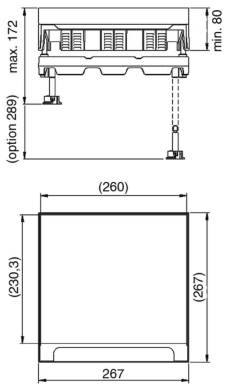

Build-in frame + tileframe + cable outlet + alu frame

Max. load: 2000 N (small surface area)

Max. load: 3000 N (large surface area)

Active condition: IP 20

Non-active condition: IP 30

Depth of floor covering: Flat

Standard finish

Stainless Steel 304

HD	Reference	mm	mm	mm	mm	kg/stk		Stock	Unit
-	<b>KDVITV3</b>		267		267	3,350	1	X	STK

Tested to EN 50085-2-2.

Hinged cover for 3 compartments.

Can be leveled by adjusting 4 bolts on included alu-frame NEOT3.

Hinged cover is provided with 2 cable outlets with integrated push lever and 2 cable organisers.

Hinged cover is provided with an earthing strip between cover and frame.

For use in dry floors only.