




## KDVKK3

## Hinged cover square, universal

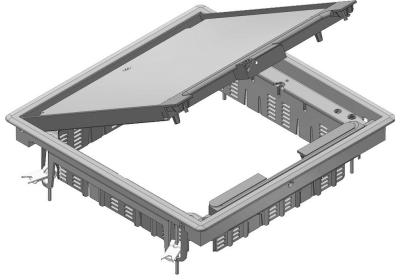

Build-in frame + hinged cover +  
cable outlet unit

Standard finish

Polypropylene

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk		Stock	Unit
-	KDVKK3.5-9011		267		267	2,200	6	v	STK
-	KDVKK3.5-7011		267		267	2,200	6	v	STK

Tested to EN 50085-2-2.

Hinged cover for 3 compartments.

Depth of floor covering is standard 5 mm and can be reduced by fitting packers OHEV3.2 and/or OHEV3.5.

Can be fixed through included universal clamps in raised floor panels.

- Cut-outs in the floor panels 270x270 mm (with a tolerance of -1 mm to +2 mm).
- Clamping range 30 to 50 mm

Hinged cover is provided with 2 cable outlets with integrated push lever and cable organiser.

Hinged cover must not be earthed.

For use in dry floors only.