
TFCL85
Industrial floor trunking

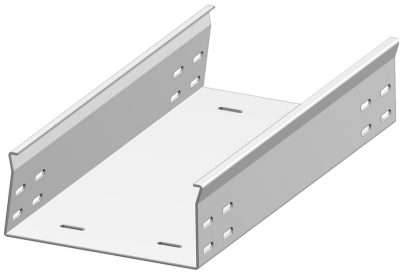


Non-perforated base
Return flanges

Reference	↕ mm	↔ mm	→‖← mm	⇄ mm	kg/m	📦	Unit
TFCL85.100.200	85	100	2	3000	4,430	30	M
TFCL85.150.200	85	150	2	3000	5,230	30	M
TFCL85.200.200	85	200	2	3000	6,030	30	M
TFCL85.250.200	85	250	2	3000	6,830	30	M
TFCL85.300.200	85	300	2	3000	7,630	30	M

Application area: Industrial floor trunking is being used in surroundings where robots need to have a permanent freedom of movement and where people need to be allowed to walk on the cable trays. For example, at production lines in the automotive industry.

Fix with:



Joining plate
V60.200