


KCL

Snap-in bracket

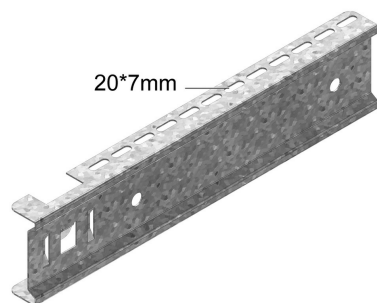

No fixing elements required. For
fixing to ceiling profiles
HDHSLECL and assembly profile
MPCL + KPCL.

Standard finish

Pre-galvanised

	Max. load (in daN)
KCL100	110
KCL150	100
KCL200	100
KCL250	90
KCL300	90
KCL400	70
KCL500	60
KCL600	50

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk		Stock	Unit
-	KCL100	80	180			0,22	12	v	STK
-	KCL150	80	230			0,3	12	v	STK
-	KCL200	80	280			0,35	12	v	STK
-	KCL250	80	330			0,44	24	v	STK
-	KCL300	80	380			0,47	12	v	STK
-	KCL400	80	480			0,75	6	v	STK
-	KCL500	80	580			0,95	6	v	STK
-	KCL600	80	680			1,13	6	v	STK

To order per full packaging.

Adapter CLHS for a symmetrical fixing.

Max. load (in daN): uniformly distributed over complete width of cantilever brackets.