


WKCL


Snap-in bracket for MP-profile

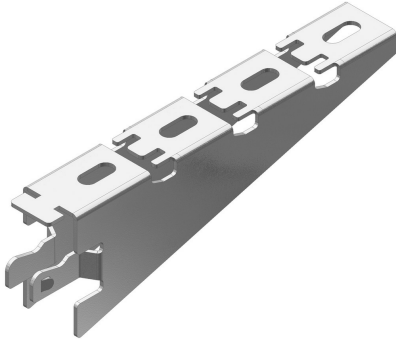

Ideal in combination with ceiling profile HSLE3 and perforated MP-profile.

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised

	Max. load (daN) HSLE3
WKCL100	190
WKCL150	190
WKCL200	160
WKCL300	125
WKCL400	90
WKCL500	70

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk		Stock	Unit
HD	WKCL100	65	100			0,229	12	v	STK
HD	WKCL150	65	150			0,294	12	v	STK
HD	WKCL200	65	200			0,334	12	v	STK
HD	WKCL300	65	300			0,464	12	v	STK
HD	WKCL400	65	400			0,604	4	v	STK
HD	WKCL500	65	500			0,744	4	v	STK

To order per full packaging.

Max. load (in daN): uniformly distributed over complete width of cantilever brackets.

When used with cable ladders, please pay attention to the length.