


## WKMP41.21

### Bolt-on wall bracket MP41.21

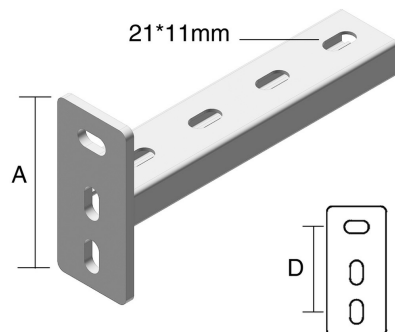

Standard finish

Electro zinc-plated

Optional finish

Hot-dip galvanised

	Max. load (in daN)	A	D
WKMP41.21.150	380	112	74
WKMP41.21.200	250	112	74
WKMP41.21.300	160	112	74

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk	📦	Stock	Unit
HD	WKMP41.21.150	112	150			0,45	12	v	STK
HD	WKMP41.21.200	112	200			0,55	12	v	STK
HD	WKMP41.21.300	112	300			0,65	1	v	STK

To order per full packaging.

Max. load (in daN): uniformly distributed over complete width of cantilever brackets.

When used with cable ladders, please pay attention to the length.