


WKMP41.41

Bolt-on wall bracket MP41.41

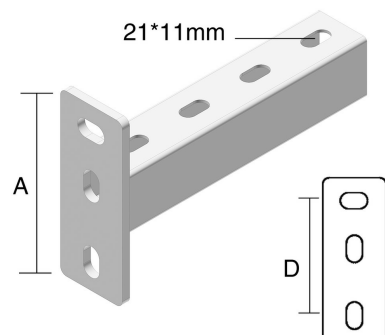

Standard finish

Electro zinc-plated

Optional finish

Hot-dip galvanised

	Max. load (in daN)	A	D
WKMP41.41.300	500	132	93
WKMP41.41.400	350	132	93
WKMP41.41.500	275	132	93
WKMP41.41.600	200	132	93
WKMP41.41.750	180	132	93
WKMP41.41.1000	130	132	93

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk	📦	Stock	Unit
HD	WKMP41.41.300	132	300			0,9	1	v	STK
HD	WKMP41.41.400	132	400			1,1	1	v	STK
HD	WKMP41.41.500	132	500			1,3	1	v	STK
HD	WKMP41.41.600	132	600			1,5	1	v	STK
HD	WKMP41.41.750	132	750			1,8	1	v	STK
HD	WKMP41.41.1000	132	1000			2,3	1	v	STK

To order per full packaging.

Max. load (in daN): uniformly distributed over complete width of cantilever brackets.

When used with cable ladders, please pay attention to the length.