


WKMPCL41.41

Universal wall bracket MP41.41

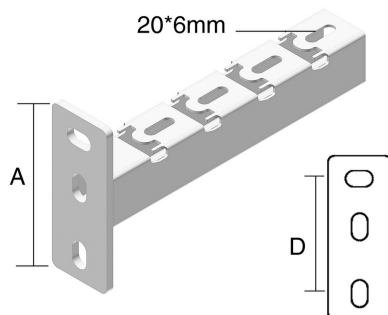

Standard finish

Electro zinc-plated

Optional finish

Hot-dip galvanised

| | Max. load (in daN) | A | D |
|-----------------|--------------------|-----|----|
| WKMPCL41.41.300 | 265 | 132 | 93 |
| WKMPCL41.41.400 | 235 | 132 | 93 |
| WKMPCL41.41.500 | 190 | 132 | 93 |
| WKMPCL41.41.600 | 120 | 132 | 93 |

| HD | Reference | ↑ mm | ↔ mm | ≡ mm | ↔ mm | kg /stk | 📦 | Stock | Unit |
|----|-----------------|---------|---------|---------|---------|------------|---|-------|------|
| HD | WKMPCL41.41.300 | 132 | 350 | | | 0,97 | 1 | v | STK |
| HD | WKMPCL41.41.400 | 132 | 450 | | | 1,09 | 1 | v | STK |
| HD | WKMPCL41.41.500 | 132 | 550 | | | 1,22 | 1 | v | STK |
| HD | WKMPCL41.41.600 | 132 | 650 | | | 1,34 | 1 | v | STK |

To order per full packaging.

Max. load (in daN): uniformly distributed over complete width of cantilever brackets.