


WKUMP41.41

Bolt-on bracket MP41.41 for ceil. prof.

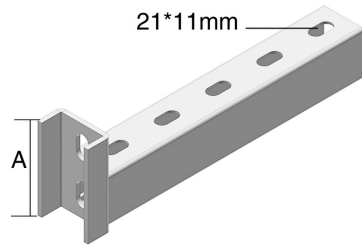

Standard finish

Electro zinc-plated

Optional finish

Hot-dip galvanised

	Max. load (in daN)	A
WKUMP41.41.300	400	80
WKUMP41.41.400	300	80
WKUMP41.41.500	240	80
WKUMP41.41.600	175	80
WKUMP41.41.750	160	80
WKUMP41.41.1000	90	80

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk		Stock	Unit
HD	WKUMP41.41.300	80	300			0,9	1	v	STK
HD	WKUMP41.41.400	80	400			1,1	1	v	STK
HD	WKUMP41.41.500	80	500			1,3	1	v	STK
HD	WKUMP41.41.600	80	600			1,5	1	v	STK
HD	WKUMP41.41.750	80	750			1,8	1	v	STK
HD	WKUMP41.41.1000	80	1000			2,3	1	v	STK

To order per full packaging.

Max. load (in daN): uniformly distributed over complete width of cantilever brackets.

When used with cable ladders, please pay attention to the length.