


WKUMPCL41.41

Universal bracket MP41.41 for ceil. prof

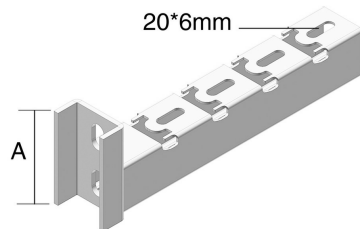

Standard finish

Electro zinc-plated

Optional finish

Hot-dip galvanised

	Max. load (in daN)	A
WKUMPCL41.41.150	550	80
WKUMPCL41.41.200	550	80
WKUMPCL41.41.300	265	80
WKUMPCL41.41.400	235	80
WKUMPCL41.41.500	190	80
WKUMPCL41.41.600	120	80

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk		Stock	Unit
HD	WKUMPCL41.41.150	80	200			0,52	12	v	STK
HD	WKUMPCL41.41.200	80	250			0,84	12	v	STK
HD	WKUMPCL41.41.300	80	350			0,97	1	v	STK
HD	WKUMPCL41.41.400	80	450			1,09	1	v	STK
HD	WKUMPCL41.41.500	80	550			1,22	1	v	STK
HD	WKUMPCL41.41.600	80	650			1,34	1	v	STK

To order per full packaging.

Max. load (in daN): uniformly distributed over complete width of cantilever brackets.